


Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

QUASAR EXIT SIGN & EMERGENCY COMBO

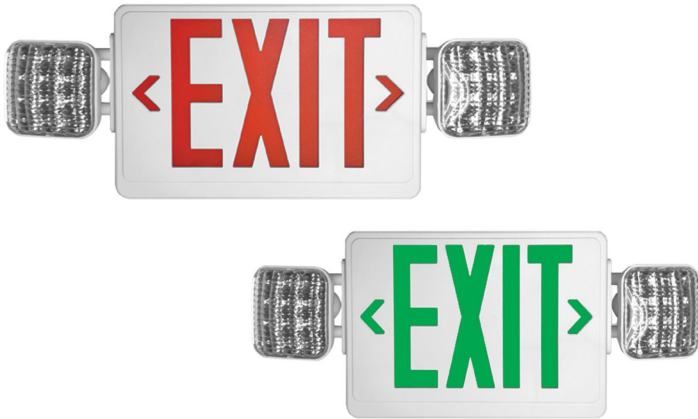

The **Quasar Exit Sign & Emergency Combo** is the perfect choice when space is at a premium. The combination exit and emergency lighting has a self-diagnostic option available. It is ideal for applications requiring quick installation of both exit sign and emergency light. Each unit has a streamlined design for above-the-door applications and other tight fits. This combo exit & emergency light delivers 25' center-to-center spacing to meet the NFPA 101 Life Safety Code with fewer fixtures.

FEATURES

- Optional self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation.
- UL listed for damp applications
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Optional high-lumen heads are available for increased center-to-center spacing
- Advanced light pipe design

APPLICATIONS

- Above doors and other tight spaces
- Strairways
- Hallways
- Paths of egress



QUASAR EXIT SIGN & EMERGENCY COMBO

ORDERING INFORMATION

PART NUMBER	LETTER COLOR	NUMBER OF FACES	HOUSING COLOR	OPTIONS	MIN ORDER QTY	US STOCK
ECO-HSL-LEDCXTEU2RW	RED	Single/Single+Double	White/Black	Remote Capable (Standard)/ High Lumen/Self-diagnostics	2	YES
ECO-HSL-LEDCXTEU2GW	GREEN	Single/Single+Double	White/Black	Remote Capable (Standard)/ High Lumen/Self-diagnostics	2	YES

TECHNICAL SPECIFICATIONS

Input Voltage	Dual 120/277 voltage
Wattage	3.0-5.7W, depending on voltage and options selected
Input Current	0.014-0.046A, depending on voltage and options selected
Certifications	UL924, NFPA 101 Life Safety Code, NEC, OSHA, local & state codes
Environment	Damp location listed
Fixture Material	Injection-molded, 5VA flame retardant, high-impact resistant, thermoplastic
Operating Temperature	32° - 104° F
Testing	Optional self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation
Mounting	EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.
Battery	9.6V long life, maintenance-free, rechargeable NiCd battery
Emergency Operation	>90 minutes of emergency illumination

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.

QUASAR EXIT SIGN & EMERGENCY COMBO

DIMENSIONS

