


Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

LUMA ADAPT DOWN LIGHT

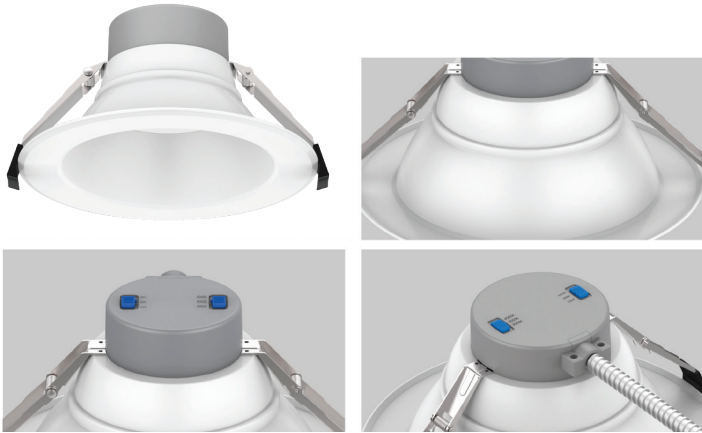


The Luma Adapt Down Lights have a highly compact design, field-adjustable light engine, and high transmittance polycarbonate lens, to provide uniform and diffuse lighting output. The aluminum housing delivers excellent thermal management. The convenient mounting design, enables quick installation and easy maintenance. This down light can be used for retrofit or new construction installation. They are offered in a full set of sizes: 4", 6", 8", and 10" diameters. They deliver up to 115 lpW, wet location listing, and insulation-contact (IC) rated. They reduce inventory carrying requirements with 3-CCT selectability and 3-output selectability, with 0-10V dimming. These luminaires are ideal for commercial applications, such as offices, retail, schools, hotels, restaurants, as well as residential use.

FEATURES

- 3-CCT and 3-output selectable
- System Efficiency - up to 115 lm/W
- Up to 3,100 lumens
- 0-10V dimming
- IC rated
- Wet location listed / IP54 rated
- Input Voltage - 120-277VAC
- Rebate Eligible - Yes, ENERGY STAR Listed, Contact for details
- Warranty - 10 Years or 50,000
- Hours Non-Prorated

APPLICATIONS

- Offices
- Retail
- Schools
- Hotels
- Restaurants
- Residential



LUMA ADAPT DOWN LIGHT

ORDERING INFORMATION

PART NUMBER	WATTAGE	LUMENS	VOLTAGE	DIMENSIONS	CCT	MIN ORDER QTY	US STOCK
ECO-UP-ADAPT-12W-DL4	6W/8W/12W	700/900/1200	120-277VAC	5.9" x 5.9" x 3.6"	3000K/4000K/5000K	2	No
ECO-UP-ADAPT-16W-DL6	8W/12W/16W	1000/1500/2000	120-277VAC	8.3" x 8.3" x 4.4"	3000K/4000K/5000K	2	No
ECO-UP-ADAPT-22W-DL8	12W/16W/22W	1500/2000/2750	120-277VAC	10.3" x 10.3" x 4.9"	3000K/4000K/5000K	2	No
ECO-UP-ADAPT-33W-DL10	22W/28W/33W	2750/3500/4125	120-277VAC	11.6" x 11.6" x 5.5"	3000K/4000K/5000K	2	No

TECHNICAL SPECIFICATIONS


Beam Angle	80° for 4" & 6", 90° for 8" & 10"
CRI	80+
Efficacy	Up to 125 lpW
IP Rating	IP54 and wet location listed
Power Frequency	60 Hz
Power Efficiency	Up to 89%
Power Factor	Up to 0.9
THD	<20% @ 277VAC
Certifications	ENERGY STAR, cETLus, FCC, IC rated, Wet location listed
Fixture Material	Aluminum & Polycarbonate
Rated Life (L70)	50,000 Hours
Warranty	10 Years or 50,000 Hours Non-Prorated
Operating Temperature	-4 to 149 F
Luminaire Gross Weight	0.88/1.50/1.98/2.31 lbs
Optional Mounting	Goof rings, New Construction or Remodel Plate for T-grid Ceilings, New Construction Plate for Stud/Joist Ceilings, Safety lanyard, Emergency power supply
Housing Color	White

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.

LUMA ADAPT DOWN LIGHT


ACCESSORIES

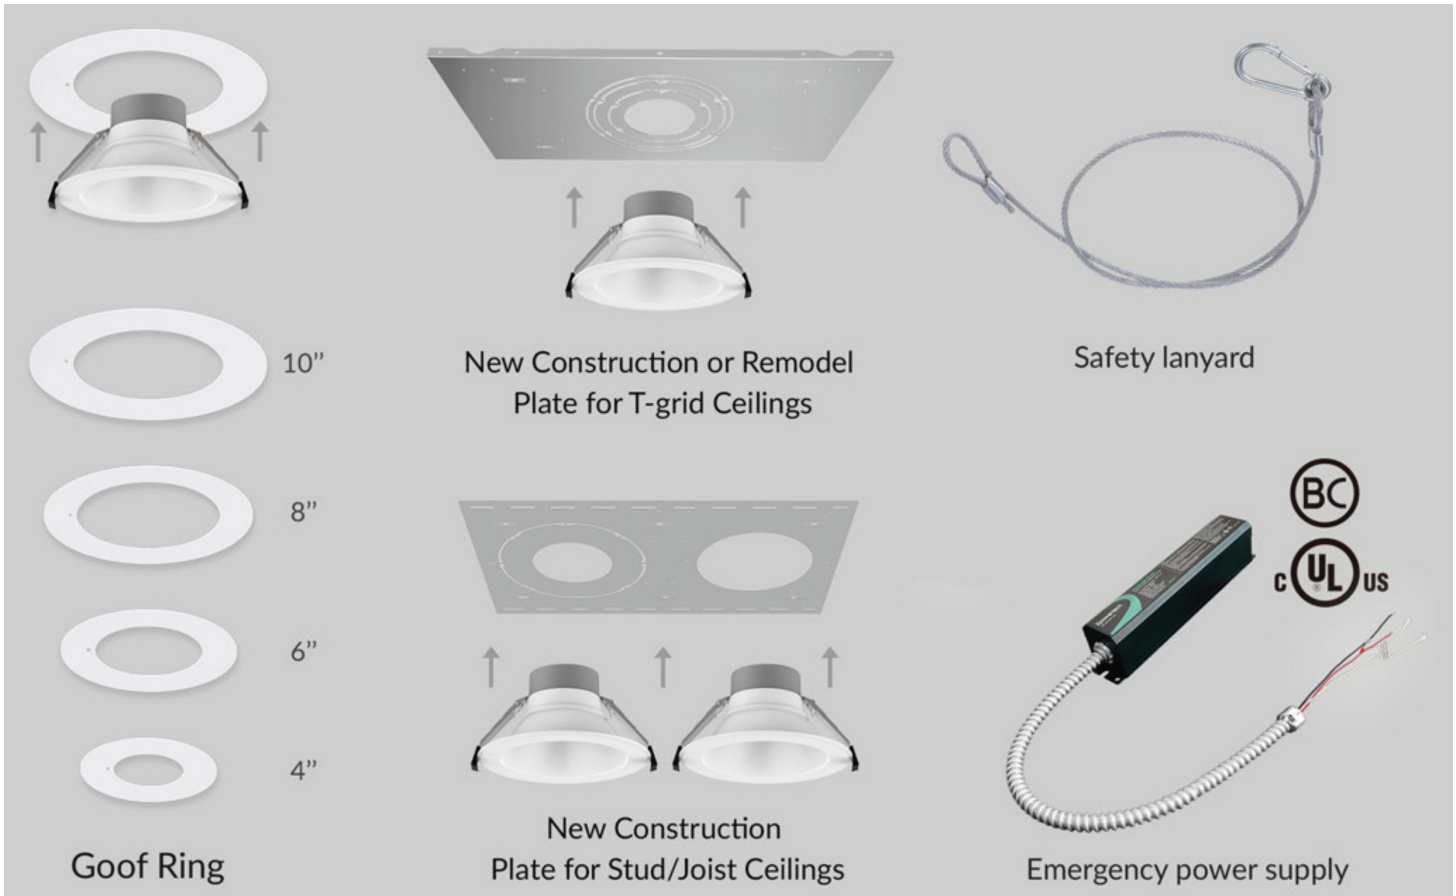

CONTROLS

Control Options: 0-10V dimming

DIMENSIONS

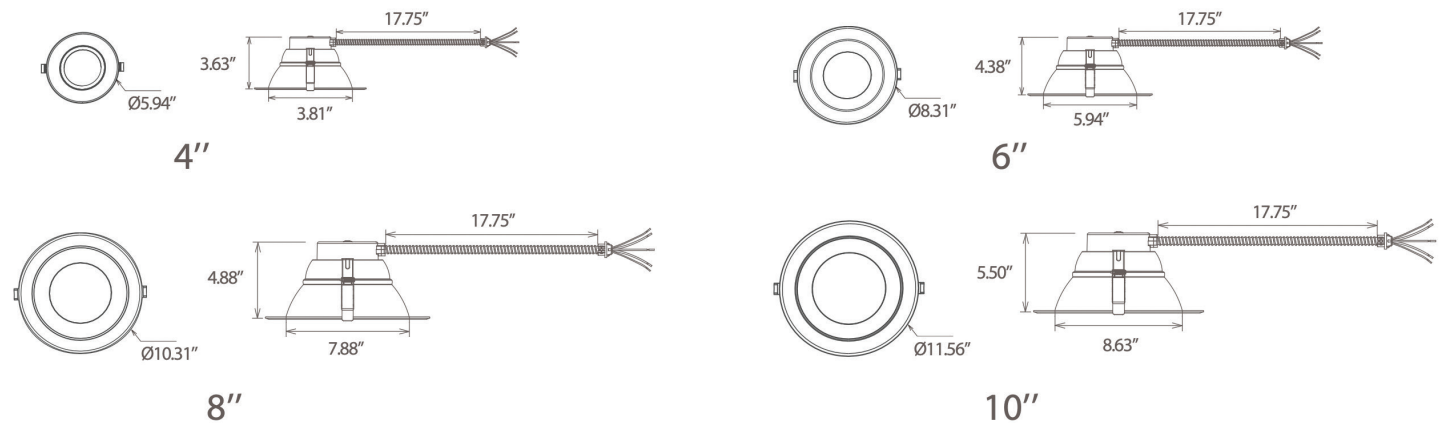

* As the products are upgraded, the accessories may differ from those described in the pictures. Please consult with our sales team for updated details and order separately.