

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

CONSTELLATION SELECT CANOPY




The Constellation Select Canopy has a contemporary, low-profile design that works in applications where other canopy fixtures will not. Although this fixture has a modest size, it is a very high performing fixture. With high lumen output and uniquely designed lens, this fixture provides exceptional performance and is a very cost effective solution for any garage or canopy application. Fixture has multiple wiring ports for direct wiring or when using surface mounted conduit.

FEATURES

- System Efficiency - up to 141 lm/W
- Luminous Flux - up to 8000 lumens
- Replaces 100-175W metal halide
- Input Voltage - 120-277 MV
- Rebate Eligible - Yes, DLC Listed / Contact for details
- Warranty - 10 Years or 50,000 Hours Non-Prorated
- PIR sensor and emergency battery options
- Sealed, die-cast housing, wet location listed

APPLICATIONS

- Gas stations
- Canopy
- Parking garages
- Storage areas
- Shopping area walkways
- Entryways



CONSTELLATION SELECT CANOPY

ORDERING INFORMATION

PART NUMBER	WATTS	VOLTAGE	LUMENS	CCT	DIMMABLE	MIN ORDER QTY	US STOCK
ECO-ULTRA-MES-20W	20W	100-277 VAC	2,600	4000K, 5000K	No	2	Yes
ECO-ULTRA-MES-27W	27W	100-277 VAC	3,800	4000K, 5000K	1-10V	2	Yes
ECO-ULTRA-MES-40W	40W	100-277 VAC	5,450	4000K, 5000K	1-10V	2	Yes
ECO-ULTRA-MES-60W	60W	100-277 VAC	8,000	4000K, 5000K	1-10V	2	Yes

TECHNICAL SPECIFICATIONS

System Efficacy	up to 141 lm/W
Luminous Flux	up to 8,000 lumens
CCTs	4000K, 5000K
CRI	70+
Input Voltage	120-277 VAC
Power Frequency	50-60 Hz
Certifications	UL, DLC , FCC
Environment	Wet listed
Lifetime (L70)	50,000 hours
Warranty	10 years or 50,000 hours non-prorated
Operating Temperature	-40°F - +104°F
Housing Color	Dark Bronze, Black, White, Silver Gray
Dimmable	0-10V (except 20W)

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.

CONSTELLATION SELECT CANOPY

MOUNTING ACCESSORIES

Housing

One piece die cast housing, better waterproofing, suitable for both indoor and outdoor application.

Mounting Bracket

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.

PHOTOMETRY

Parking Garage Photometry and polycarbonate optical lens with heat resisting.

1/2inch knock hole


Support wires coming from the hole for easier wire connections. Optional PIR sensor and Emergency Battery.



CONTROLS

Control Options: 0-10V (except 20W) / PIR sensor option / emergency battery option (except 20W).

PHOTOMETRICS

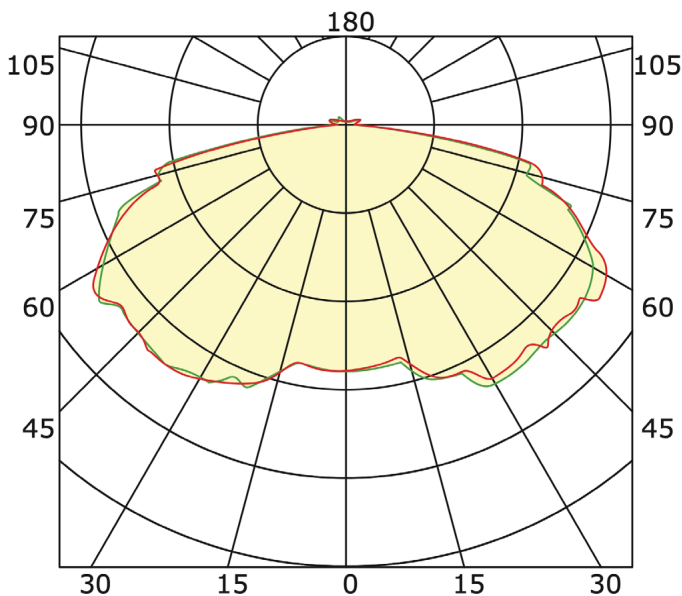

CONSTELLATION SELECT CANOPY




DIMENSIONS

Net Weight:

20W: 3.536lbs

27W: 3.615lbs

40W: 4.166lbs

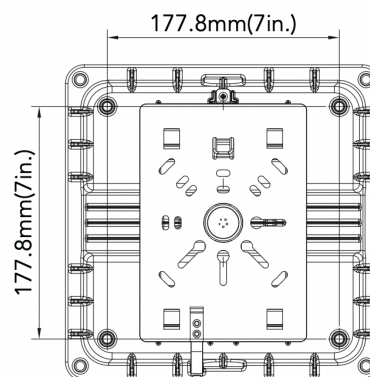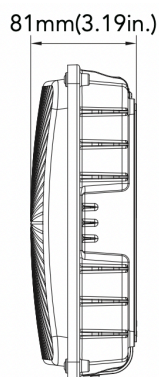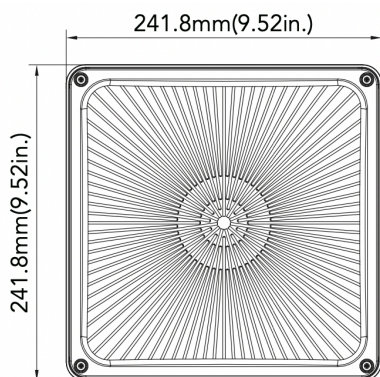

Net Weight:

60W: 5.070lbs

