

| | |
|---------------------|---------------|
| Project Name: | Fixture Type: |
| Complete Catalog #: | Date: |
| Comments: | |

PHOTON CYLINDRICAL PENDANT FIXTURE




The Photon Cylindrical Pendant Fixture features industry leading visual comfort, excellent uniform illumination, and installation flexibility. The Cylinders are 4-wattage and 5-CCT selectable, allowing each model to replace 20 conventional models. This reduces inventory costs for distributors and contractors. The cylinders come in round and square classic designs, in black, white or bronze finishes. They are sleek, contemporary, and architectural-grade, available in 2.75", 5", and 6" diameters, and various beam angles. There are three mounting options: wall mount, surface mount, or pendant mount. Three dimming options include TRIAC and 0-10V, 0-10V, or Non-dimming.

FEATURES

- Up to 3,000 lumens and 30W
- 4-wattage and 5-CCT selectable to reduce inventory
- 2.75", 5", and 6" diameter cylinder options
- Dimming: TRIAC and 0-10V, 0-10V, and non-dimmable options
- 120-277VAC and 120-347VAC options
- Square or round cylinder
- Emergency backup option

APPLICATIONS

- Hospitality
- Offices
- Education
- Medical
- Other indoor architectural settings



PHOTON CYLINDRICAL PENDANT FIXTURE

ORDERING INFORMATION

| PART NUMBER | SYSTEM WATTS - SWITCHABLE | LUMENS - SWITCHABLE | VOLTAGE | CCT - SWITCHABLE | PROFILE | DIA-METER | MIN ORDER QTY | US STOCK |
|------------------------|---------------------------|---------------------|-------------|-------------------------------|---------|-----------|---------------|----------|
| ECO-SDR-CYLR-30W-2-PL2 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-277 VAC | 2700K/3000K/3500K/4000K/5000K | Round | 2.75" | 1 | YES |
| ECO-SDR-CYLS-30W-2-PL2 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-277 VAC | 2700K/3000K/3500K/4000K/5000K | Square | 2.75" | 1 | YES |
| ECO-SDR-CYLR-30W-3-PL2 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-347VAC | 2700K/3000K/3500K/4000K/5000K | Round | 2.75" | 1 | YES |
| ECO-SDR-CYLS-30W-3-PL2 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-347VAC | 2700K/3000K/3500K/4000K/5000K | Square | 2.75" | 1 | YES |
| ECO-SDR-CYLR-30W-2-PL5 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-277 VAC | 2700K/3000K/3500K/4000K/5000K | Round | 5" | 1 | YES |
| ECO-SDR-CYLS-30W-2-PL5 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-277 VAC | 2700K/3000K/3500K/4000K/5000K | Square | 5" | 1 | YES |
| ECO-SDR-CYLR-30W-3-PL5 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-347VAC | 2700K/3000K/3500K/4000K/5000K | Round | 5" | 1 | YES |
| ECO-SDR-CYLS-30W-3-PL5 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-347VAC | 2700K/3000K/3500K/4000K/5000K | Square | 5" | 1 | YES |
| ECO-SDR-CYLR-30W-2-PL6 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-277 VAC | 2700K/3000K/3500K/4000K/5000K | Round | 6" | 1 | YES |
| ECO-SDR-CYLS-30W-2-PL6 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-277 VAC | 2700K/3000K/3500K/4000K/5000K | Square | 6" | 1 | YES |
| ECO-SDR-CYLR-30W-3-PL6 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-347VAC | 2700K/3000K/3500K/4000K/5000K | Round | 6" | 1 | YES |
| ECO-SDR-CYLS-30W-3-PL6 | 30W/25W/20W/15W | 3000 - 1500 lumens | 120-347VAC | 2700K/3000K/3500K/4000K/5000K | Square | 6" | 1 | YES |

TECHNICAL SPECIFICATIONS

| | |
|------------------------------|--|
| System Efficacy | 100 lm/W |
| Wattage | 30W/25W/20W/15W - switchable |
| Luminous Flux | up to 3,000 lumens - switchable |
| CCTs | 2700K/3000K/3500K/4000K/5000K switchable |
| CRI | 80+ or 90+ |
| Input Voltage | 120-277 or 120-347 VAC |
| Certifications | cETLus , FCC |
| Lifetime (L70) | >50,000 hours |
| Warranty | 10 years or 50,000 hours non-prorated |
| Minimum Starting Temperature | -4° F |
| Mounting Options | Wall, Surface or Pendant |
| Dimmable | TRAIC and 0- 10V, 0-10V or Non-dimming |
| Cylinders | Round or Square. 2.75", 5", or 6" diameters |
| Finish | Black, Silver, White, or Bronze |
| Net Luminaire Weight | 41.9 lbs (6" diameter) |
| Other Options | Emergency back up; stem, surface, or cord installation; with or without supply cord; various beam angles |


*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.


PHOTON CYLINDRICAL PENDANT FIXTURE

MOUNTING OPTIONS

3 mounting options: wall, surface or pendant mount. Mount on a 3" or 4" octagonal j-box.

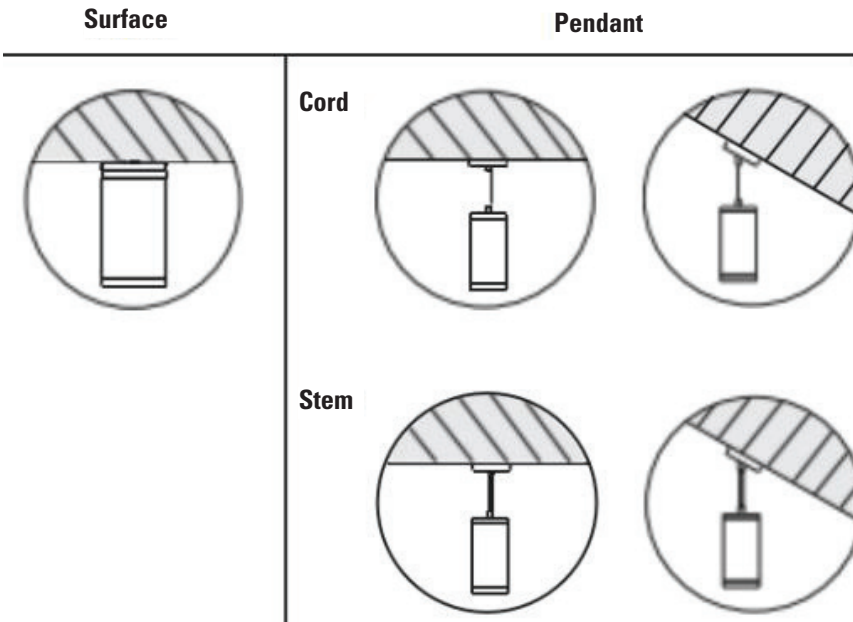

Junction Box Adapter Plate:

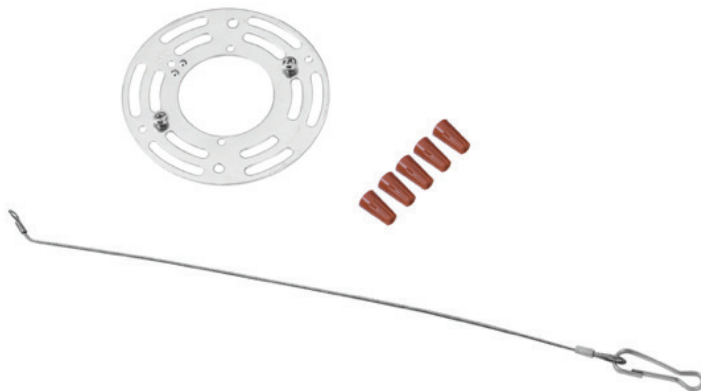

Stem Kit:



PHOTON CYLINDRICAL PENDANT FIXTURE

DIMENSIONS

unit: mm/inch

