









AREA & PARKING FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Aurora Fixture 	ECO-AURO-FLE450W-AL	135 lm/W	60750	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	30.16" x 24.98" x 2.76"	N
	ECO-AURO-FLE600W-AL	135 lm/W	81000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	34.84" x 24.98" x 2.76"	N
	ECO-AURO-FLE750W-AL	135 lm/W	101250	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	41.93" x 24.98" x 2.76"	N
	ECO-AURO-FLE900W-AL	135 lm/W	121500	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	46.65" x 24.98" x 2.76"	N
Sirius Area Light Fixture 	ECO-KOA-75W-OT	170 lm/W	12750	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	23" x 11" x 2.2"	Y
	ECO-KOA-115W-OT	170 lm/W	19550	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	23" x 11" x 2.2"	Y
	ECO-KOA-145W-OT	170 lm/W	24650	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	23" x 11" x 2.2"	Y
	ECO-KOA-180W-OT	170 lm/W	30600	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	26.7" x 14" x 2.2"	Y
	ECO-KOA-200W-OT	170 lm/W	34000	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	26.7" x 14" x 2.2"	Y
	ECO-KOA-230W-OT	170 lm/W	39100	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	26.7" x 14" x 2.2"	Y
	ECO-KOA-300W-OT	170 lm/W	51000	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	30" x 14" x 3"	Y
	ECO-KOA-420W-OT	170 lm/W	71400	3000-6500K	Type III, IV, V	100-277 MV*	IP66	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE, FCC	30" x 14" x 3"	Y
Alfa Series Area Light 	ECO-ALFA-SLA30W-SL	135 lm/W	4050	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	18.23" x 13.58" x 4.57"	N
	ECO-ALFA-SLA60W-SL	135 lm/W	8100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	20.59" x 13.58" x 4.57"	N
	ECO-ALFA-SLA90W-SL	135 lm/W	12150	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	22.95" x 13.58" x 4.57"	N
	ECO-ALFA-SLA120W-SL	135 lm/W	16200	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	25.31" x 13.58" x 4.57"	N
	ECO-ALFA-SLA150W-SL	135 lm/W	20250	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	27.68" x 13.58" x 4.57"	N
	ECO-ALFA-SLA180W-SL	135 lm/W	24300	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	30.04" x 13.58" x 4.57"	N
	ECO-ALFA-SLA210W-SL	135 lm/W	28350	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	32.40" x 13.58" x 4.57"	N
	ECO-ALFA-SLA240W-SL	135 lm/W	32400	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	34.76" x 13.58" x 4.57"	N
	ECO-ALFA-SLA270W-SL	135 lm/W	36450	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	37.13" x 13.58" x 4.57"	N
	ECO-ALFA-SLA300W-SL	135 lm/W	40500	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	39.49" x 13.58" x 4.57"	N
Spectre Park Fixture 	ECO-SPT60B-60W	140 lm/W	8400	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	22.95" x 11.14" x 5.9"	N
	ECO-SPT60B-100W	140 lm/W	14000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	22.95" x 11.14" x 5.9"	N
	ECO-SPT60B-120W	140 lm/W	16800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	22.95" x 11.14" x 5.9"	N
	ECO-SPT60B-150W	140 lm/W	21000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	22.95" x 11.14" x 5.9"	Y
	ECO-SPT60B-200W	140 lm/W	28000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	22.95" x 11.14" x 5.9"	N
	ECO-SPT60B-250W	140 lm/W	35000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	24.13" x 14.09" x 5.9"	N
	ECO-SPT60B-300W	140 lm/W	42000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	NON DIMMABLE	UL, CUL, DLC Premium	24.13" x 14.09" x 5.9"	Y





THE INDUSTRY'S ONLY 10 YEAR NON-PRORATED PRODUCT WARRANTY







AREA & PARKING FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>Magellan 7</p> 	ECO-TLMAG-100W-SB	140 lm/W	14000	3000-6500K	Type III, IV, V	100-277 MV*	IP66	Motion Sensor, Photocell	UL, CUL, DLC, FCC	19.35" x 13.69" x 6.38"	N
	ECO-TLMAG-150W-SB	140 lm/W	21000	3000-6500K	Type III, IV, V	100-277 MV*	IP66	Motion Sensor, Photocell	UL, CUL, DLC, FCC	19.35" x 13.69" x 6.38"	N
	ECO-TLMAG-200W-SB	140 lm/W	28000	3000-6500K	Type III, IV, V	100-277 MV*	IP66	Motion Sensor, Photocell	UL, CUL, DLC, FCC	21.80" x 13.89" x 6.38"	N
	ECO-TLMAG-240W-SB	140 lm/W	33600	3000-6500K	Type III, IV, V	100-277 MV*	IP66	Motion Sensor, Photocell	UL, CUL, DLC, FCC	21.80" x 13.89" x 6.38"	N
	ECO-TLMAG-300W-SB	140 lm/W	42000	3000-6500K	Type III, IV, V	100-277 MV*	IP66	Motion Sensor, Photocell	UL, CUL, DLC, FCC	26.60" x 13.70" x 6.38"	N
<p>Meteor II Area Light Fixture</p> 	ECO-AAL-DEL-60W-01	135 lm/W	8100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	22.44" x 14.17" x 5.51"	N
	ECO-AAL-DEL-90W-01	135 lm/W	12150	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	22.44" x 14.17" x 5.51"	Y
	ECO-AAL-DEL-120W-01	135 lm/W	16200	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	22.44" x 14.17" x 5.51"	N
	ECO-AAL-DEL-150W-01	135 lm/W	20250	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	22.44" x 14.17" x 5.51"	Y
	ECO-AAL-DEL-185W-01	135 lm/W	24975	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	32.28" x 15.35" x 5.71"	Y
	ECO-AAL-DEL-240W-01	135 lm/W	32400	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	32.28" x 15.35" x 5.71"	Y
	ECO-AAL-DEL-300W-01	135 lm/W	40500	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	32.28" x 15.35" x 5.71"	Y
	ECO-AAL-DEL-400W-01	135 lm/W	54000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	32.28" x 15.35" x 5.71"	N
	ECO-AAL-DEL-480W-01	135 lm/W	64800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	Photocell, Motion Sensor	UL, CUL, DLC Premium	28.15" x 27.76" x 7.68"	Y
<p>Radiant Shoe Box Fixture</p> 	ECO-GI-RAD-65W-6SB	120 lm/W	7800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	14.13" x 10.83" x 3.35"	Y
	ECO-GI-RAD-105W-6SB	110 lm/W	11550	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	14.13" x 10.83" x 3.35"	Y
	ECO-GI-RAD-140W-6SB	115 lm/W	16100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	14.13" x 10.83" x 3.35"	Y
	ECO-GI-RAD-210W-6SB	120 lm/W	25200	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	18.27" x 15.75" x 4.17"	N
	ECO-GI-RAD-300W-6SB	116 lm/W	34800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	18.27" x 15.75" x 4.17"	Y
<p>Lunar Area Light</p> 	ECO-GI-LBL-35W	101 lm/W	3535	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	NON DIMMABLE	UL, CUL, DLC	14.8" x 7.7" x 7.7"	Y
	ECO-GI-LBL-45W	117 lm/W	5265	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	NON DIMMABLE	UL, CUL, DLC	14.8" x 7.7" x 7.7"	Y




BULBS & DOWN LIGHT RETROFIT KITS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>Luma Adapt Down Light</p>  <p>NEW PRODUCT</p>	ECO-UP-ADAPT-12W-DL4	115 lm/W	1380	3000-5000K	80°, 90°	100-277 MV	IP54	0-10V Dimming	Energy Star, ETL, FCC	5.93" x 3.63"	N
	ECO-UP-ADAPT-16W-DL6	115 lm/W	1840	3000-5000K	80°, 90°	100-277 MV	IP54	0-10V Dimming	Energy Star, ETL, FCC	8.31" x 4.38"	N
	ECO-UP-ADAPT-22W-DL8	115 lm/W	2530	3000-5000K	80°, 90°	100-277 MV	IP54	0-10V Dimming	Energy Star, ETL, FCC	10.31" x 4.88"	N
	ECO-UP-ADAPT-33W-DL10	115 lm/W	3795	3000-5000K	80°, 90°	100-277 MV	IP54	0-10V Dimming	Energy Star, ETL, FCC	11.56" x 5.5"	N
<p>Dolux Down Light</p> 	ECO-SCDL3-5W	100 lm/W	500	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	3.94" x 2.09"	N
	ECO-SCDL3-7W	100 lm/W	700	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	3.94" x 2.09"	N
	ECO-SCDL3-9W	100 lm/W	900	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	3.94" x 2.09"	N
	ECO-SCDL3-12W	100 lm/W	1200	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	3.94" x 2.09"	N
	ECO-SCDL4-7W	100 lm/W	700	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	4.65" x 2.44"	N
	ECO-SCDL4-9W	100 lm/W	900	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	4.65" x 2.44"	N
	ECO-SCDL4-12W	100 lm/W	1200	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	4.65" x 2.44"	N
	ECO-SCDL4-15W	100 lm/W	1500	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	4.65" x 2.44"	N
	ECO-SCDL6-12W	100 lm/W	1200	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	6.69" x 3.39"	N
	ECO-SCDL6-18W	100 lm/W	1800	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	6.69" x 3.39"	N
	ECO-SCDL6-25W	100 lm/W	2500	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	6.69" x 3.39"	N
	ECO-SCDL6-30W	100 lm/W	3000	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	6.69" x 3.39"	N
	ECO-SCDL8-18W	100 lm/W	1800	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	9.06" x 4.17"	N
	ECO-SCDL8-25W	100 lm/W	2500	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	9.06" x 4.17"	N
	ECO-SCDL8-30W	100 lm/W	3000	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	9.06" x 4.17"	N
ECO-SCDL8-35W	100 lm/W	3500	3000-5000K		100-240 MV	IP40	0-10V DIMMING	UL, CE	9.06" x 4.17"	N	
<p>A19 Standard Bulbs</p> 	ECO-HYPER-A19-5W-E26	115 lm/W	575	3000-5000K	60°	110 MV	IP20	0-10V DIMMING	UL, Energy Star		Y
	ECO-HYPER-A19-9W-E26	115 lm/W	1035	3000-5000K	60°	110 MV	IP20	0-10V DIMMING	UL, Energy Star		Y
	ECO-HYPER-A19-10W-E26	115 lm/W	1150	3000-5000K	60°	110 MV	IP20	0-10V DIMMING	UL, Energy Star		Y
<p>BR30 & BR40 Bulbs</p> 	ECO-HYPER-BR20-6W	108 lm/W	648	3000-5000K	120°	120V	IP20	0-10V DIMMING	UL, Energy Star	2.48" x 3.86"	N
	ECO-HYPER-BR20-10W	110 lm/W	1100	3000-5000K	120°	120V	IP20	0-10V DIMMING	UL, Energy Star	3.74" x 5.35"	N
	ECO-HYPER-BR20-13W	90 lm/W	1170	3000-5000K	120°	120V	IP20	0-10V DIMMING	UL, Energy Star	4.80" x 6.22"	N




BULBS & DOWN LIGHT RETROFIT KITS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Candelabra Bulbs 	ECO-KLCF-3.5W	90 lm/W	315	3000-5000K	360°	120V	IP20	0-10V DIMMING	UL, Energy Star	1.38" x 3.82"	N
	ECO-KLCF-5W	90 lm/W	450	3000-5000K	360°	120V	IP20	0-10V DIMMING	UL, Energy Star	1.38" x 3.82"	N
PAR38 Bulbs 	ECO-HYPER-PAR38-18W	90 lm/W	1620	3000-5000K	30°,38°,80°	110-130 MV	IP54	NON DIMMABLE	UL, Energy Star	4.80" x 5.35"	N
	ECO-HYPER-PAR38-20W	90 lm/W	1800	3000-5000K	30°,38°,80°	110-130 MV	IP54	NON DIMMABLE	UL, Energy Star	4.72" x 5.16"	N
G24 Horizontal & Vertical Lamps 2&4 Pin Ballast Bypass 	ECO-IG24-HPL-6W	90 lm/W	540	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, Energy Star	5.3" x 1.35"	N
	ECO-IG24-HPL-8W	90 lm/W	720	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, Energy Star	6.3" x 1.35"	N
	ECO-IG24-HPL-11W	90 lm/W	990	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, Energy Star	7.2" x 1.35"	N
	ECO-IG24-VPL-6W	90 lm/W	540	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, Energy Star	4.7" x 2.2"	N
	ECO-IG24-VPL-8W	90 lm/W	720	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, Energy Star	4.7" x 2.2"	N
	ECO-IG24-VPL-11W	90 lm/W	990	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, Energy Star	4.7" x 2.2"	N
2G11 Horizontal & Vertical Lamps 2&4 Pin Ballast Bypass 	ECO-KING-2G11-9W	89 lm/W	801	3000-5000K	120°	85-265 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	1.5" x 8.86"	N
	ECO-KING-2G11-12W	100 lm/W	1200	3000-5000K	120°	85-265 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	1.5" x 12.6"	N
	ECO-KING-2G11-15W	100 lm/W	1500	3000-5000K	120°	85-265 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	1.5" x 16.14"	N
	ECO-KING-2G11-18W	100 lm/W	1800	3000-5000K	120°	85-265 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	1.5" x 16.14"	N
	ECO-KING-2G11-20W	100 lm/W	2000	3000-5000K	120°	85-265 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	1.5" x 21.06"	N
	ECO-KING-2G11-22W	100 lm/W	2200	3000-5000K	120°	85-265 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	1.5" x 21.06"	N





BULBS & DOWN LIGHT RETROFIT KITS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Commercial Down Light Retrofit Kits 	ECO-LSD6-18W	90 lm/W	1620	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	7.87" x 7.48"	Y
	ECO-LSD6-27W	90 lm/W	2430	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	7.87" x 7.48"	Y
	ECO-LSD8-18W	90 lm/W	1620	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	8.20" x 9.29"	Y
	ECO-LSD8-27W	90 lm/W	2430	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	8.20" x 9.29"	Y
	ECO-LSD8-40W	90 lm/W	3600	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	8.20" x 9.29"	Y
	ECO-LSD10-27W	90 lm/W	2430	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	8.46" x 10.98"	N
	ECO-LSD10-40W	90 lm/W	3600	3000-5000K	40°	120-277 MV	IP20	0-10V DIMMING	UL, CUL, Energy Star	8.46" x 10.98"	N
Chameleon Down Light 	ECO-SCDL-9W-Y04-01RE	67 lm/W	603	3000-5000K	110°	90-130 MV	IP40	DIMMABLE, COLOR CHANGING	Energy Star, ETL	4.92" x .71"	Y
	ECO-SCDL-9W-Y04-02RE	67 lm/W	603	3000-5000K	110°	90-130 MV	IP40	DIMMABLE, COLOR CHANGING	Energy Star, ETL	4.92" x .71"	Y
	ECO-SCDL-12W-Y06-01RE	75 lm/W	900	3000-5000K	110°	90-130 MV	IP40	DIMMABLE, COLOR CHANGING	Energy Star, ETL	6.7" x .71"	Y
	ECO-SCDL-12W-Y06-02RE	75 lm/W	900	3000-5000K	110°	90-130 MV	IP40	DIMMABLE, COLOR CHANGING	Energy Star, ETL	6.7" x .71"	Y
	ECO-SCDL-12W-Y06H-01RE	92 lm/W	1104	3000-5000K	110°	90-130 MV	IP40	DIMMABLE, COLOR CHANGING	Energy Star, ETL	6.7" x .71"	Y
	ECO-SCDL-12W-Y06H-02RE	92 lm/W	1104	3000-5000K	110°	90-130 MV	IP40	DIMMABLE, COLOR CHANGING	Energy Star, ETL	6.7" x .71"	Y
Orbital Split Recessed J-Box Down Lights 	ECO-TKO-10W-4DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-15W-4DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-20W-4DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-40W-4DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-10W-6DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 7.62"	Y
	ECO-TKO-15W-6DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 7.62"	Y
	ECO-TKO-20W-6DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 7.62"	Y
	ECO-TKO-40W-6DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-10W-8DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 9.21"	Y
	ECO-TKO-15W-8DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 9.21"	Y
	ECO-TKO-20W-8DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 9.21"	Y
	ECO-TKO-40W-8DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-10W-10DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-15W-10DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-20W-10DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-40W-10DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y





CLEAN ROOM & STERILIZATION FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Lunar 4 Module High Bay Plus 	ECO-GCO-PLUS-100W-PVM	150 lm/W	15000	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-PLUS-150W-PVM	150 lm/W	22500	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-PLUS-200W-PVM	150 lm/W	30000	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-PLUS-240W-PVM	150 lm/W	36000	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
Lunar 4 Mobile Purge Virus Fixture 	ECO-GCO-PURGE-50W-MU	150 lm/W	7500	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-PURGE-100W-MU	150 lm/W	15000	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-PURGE-150W-MU	150 lm/W	22500	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-PURGE-200W-MU	150 lm/W	30000	2700-6500K	30°, 60°, 90°, 120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
Prism Series NSF Fixture 	ECO-YSX-PRISM-80W-CLR	190 lm/W	15200	3000-5700K	115°	100-277 MV	IP66		CUL, CE	17.08" x 7.56"	N
	ECO-YSX-PRISM-100W-CLR	190 lm/W	19000	3000-5700K	115°	100-277 MV	IP66		CUL, CE	17.08" x 7.56"	N
	ECO-YSX-PRISM-150W-CLR	190 lm/W	28500	3000-5700K	115°	100-277 MV	IP66		CUL, CE	17.08" x 7.56"	Y
	ECO-YSX-PRISM-200W-CLR	190 lm/W	38000	3000-5700K	115°	100-277 MV	IP66		CUL, CE	17.08" x 7.56"	Y



CORN RETROFIT LAMPS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>Hawk Corn Lamps</p> 	ECO-CNS-CLW-15W	150 lm/W	2250	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	6.54" x 2.56"	N
	ECO-CNS-CLW-19W	150 lm/W	2850	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	7.32" x 2.56"	N
	ECO-CNS-CLW-24W	150 lm/W	3600	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	7.71" x 2.56"	N
	ECO-CNS-CLW-27W	150 lm/W	4050	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	8.50" x 3.43"	Y
	ECO-CNS-CLW-36W	150 lm/W	5400	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	9.53" x 3.43"	Y
	ECO-CNS-CLW-45W	150 lm/W	6750	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	10.7" x 3.43"	Y
	ECO-CNS-CLW-54W	150 lm/W	8100	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	10.7" x 3.43"	Y
	ECO-CNS-CLW-75W	150 lm/W	11250	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	12.17" x 3.43"	Y
	ECO-CNS-CLW-80W	150 lm/W	12000	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	10.78" x 5.12"	Y
	ECO-CNS-CLW-100W	150 lm/W	15000	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	11.42" x 5.12"	Y
	ECO-CNS-CLW-125W	150 lm/W	18750	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium	12.40" x 5.12"	N
<p>Eagle Eye 180 Degree Retrofit Lamp – 115 lm/w</p> 	ECO-CNS-RL-27W	130 lm/W	3510	3000-5000K	90°,150°	100-277 MV	IP51	NON DIMMABLE	UL, CUL, DLC Premium	9.17" x 4.45" x 3.15"	N
	ECO-CNS-RL-36W	130 lm/W	4680	3000-5000K	90°,150°	100-277 MV	IP51	NON DIMMABLE	UL, CUL, DLC Premium	9.17" x 4.45" x 3.15"	N
	ECO-CNS-RL-54W	130 lm/W	7020	3000-5000K	90°,150°	100-277 MV	IP51	NON DIMMABLE	UL, CUL, DLC Premium	11.3" x 5.43" x 3.43"	Y
	ECO-CNS-RL-75W	130 lm/W	9750	3000-5000K	90°,150°	100-277 MV	IP51	NON DIMMABLE	UL, CUL, DLC Premium	11.69" x 5.43" x 3.43"	Y
	ECO-CNS-RL-95W	130 lm/W	12350	3000-5000K	90°,150°	100-277 MV	IP51	NON DIMMABLE	UL, CUL, DLC Premium	11.69" x 5.43" x 3.43"	N
ECO-CNS-RL-115W	130 lm/W	14950	3000-5000K	90°,150°	100-277 MV	IP51	NON DIMMABLE	UL, CUL, DLC Premium	11.69" x 5.43" x 3.43"	Y	
<p>Osprey Corn Lamps</p> 	ECO-LRBW-8W	125 lm/W	1000	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	2.36" x 4.84"	N
	ECO-LRBW-10W	125 lm/W	1250	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	2.36" x 5.63"	N
	ECO-LRBW-14W	125 lm/W	1750	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	2.76" x 5.74"	N
	ECO-LRBW-18W	125 lm/W	2250	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	2.76" x 6.54"	N
	ECO-LRBW-22W	125 lm/W	2750	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	2.76" x 7.32"	N
	ECO-LRBW-27W	125 lm/W	3375	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	3.66" x 8.07"	N
	ECO-LRBW-36W	125 lm/W	4500	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	3.66" x 9.25"	N
	ECO-LRBW-45W	125 lm/W	5625	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	3.66" x 10.43"	N
	ECO-LRBW-54W	125 lm/W	6750	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	3.66" x 10.43"	N
	ECO-LRBW-80W	125 lm/W	10000	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	3.66" x 12.4"	Y
	ECO-LRBW-100W	125 lm/W	12500	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	5.75" x 10.87"	Y
	ECO-LRBW-120W	125 lm/W	15000	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, DLC	5.75" x 11.22"	Y
<p>Condor High Bay Retrofit Lamps</p> 	ECO-HBRL-120W-EZ1	140 lm/W	16800	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	N
	ECO-HBRL-155W-EZ1	140 lm/W	21700	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	Y
	ECO-HBRL-200W-EZ1	140 lm/W	28000	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	Y
	ECO-HBRL-240W-EZ1	140 lm/W	33600	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	Y





EXIT SIGNAGE & EMERGENCY

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Contractor Select LED Exit Sign 	ECO-HSL-EZRXTU2RWEM					100-277 MV			UL		Y
	ECO-HSL-EZRXTU2GWEM					100-277 MV			UL		Y
Signature Select Aluminum LED Edgelit Exit Sign 	ECO-HSL-ELXTU1GCAEM					100-277 MV	IP		UL		Y
	ECO-HSL-ELXTU1RCAEM					100-277 MV	IP		UL		Y
Quasar Exit Sign & Emergency Combo 	ECO-HSL-LEDCXTEU2RW					100-277 MV	IP		UL		Y
	ECO-HSL-LEDCXTEU2GW					100-277 MV	IP		UL		Y
Celestial Dual Head Emergency Unit 	ECO-HSL-LED1					100-277 MV			UL		Y
	ECO-HSL-LED1B					100-277 MV			UL		Y
Celestial II Remote Capable LED Emergency Unit 	ECO-HSL-LED5HO					100-277 MV		Remote Capable	UL		Y
	ECO-HSL-LED5HOSDT					100-277 MV		Remote Capable	UL		Y





EXIT SIGNAGE & EMERGENCY

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Excelsior Decorative Outdoor LED AC/Emergency Unit 	ECO-HSL-DBELACE					100-277 MV			UL		Y
	ECO-HSL-DBELACECW					100-277 MV			UL		Y
Extender DXR Remote Emergency Unit 	ECO-HSL-DXR125					100-277 MV		Remote Capable	UL		Y
	ECO-HSL-DXR610					100-277 MV		Remote Capable	UL		Y





FLOOD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Mini & Landscape Flood Fixtures 	ECO-MFD02-20W-BLF	125 lm/W	2500	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.84" x 5.97"	Y
	ECO-MFD02-30W-BLF	112 lm/W	3360	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.84" x 5.97"	Y
	ECO-MFD03-15W-MLF	100 lm/W	1500	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	4.72" x 2.95" x 1.27"	Y
	ECO-MFD03-30W-MLF	100 lm/W	3000	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	7.08" x 4.42" x 1.61"	Y
	ECO-MFD03-45W-MLF	118 lm/W	5310	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	8.26" x 5.15" x 2"	Y
Pulsar Flood Fixtures 	ECO-CK-PULSAR-20W-FL	130 lm/W	2600	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	8.11" x 9.49" x 2.93"	N
	ECO-CK-PULSAR-30W-FL	130 lm/W	3900	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	8.11" x 9.49" x 2.93"	Y
	ECO-CK-PULSAR-50W-FL	130 lm/W	6500	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	10.75" x 11.57" x 3.73"	Y
	ECO-CK-PULSAR-70W-FL	130 lm/W	9100	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	10.75" x 11.57" x 3.73"	Y
	ECO-CK-PULSAR-80W-FL	130 lm/W	10400	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	N
	ECO-CK-PULSAR-100W-FL	130 lm/W	13000	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	N
	ECO-CK-PULSAR-120W-FL	130 lm/W	15600	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	Y
	ECO-CK-PULSAR-150W-FL	130 lm/W	19500	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	Y
	ECO-CK-PULSAR-200W-FL	130 lm/W	26000	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	18.82" x 20.43" x 5.56"	N
	ECO-CK-PULSAR-240W-FL	130 lm/W	31200	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	18.82" x 20.43" x 5.56"	N
ECO-CK-PULSAR-300W-FL	130 lm/W	39000	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	18.82" x 20.43" x 5.56"	N	
Quasar Flood Light Series 	ECO-IGQ-80W-FL	122 lm/W	9760	3000-5700K	120°	100-277 MV*	IP65	Photocell, 0-10V Dimming motion sensor	CUL, ETL	16.93" x 16.54" x 13.39"	Y
	ECO-IGQ-100W-FL	125 lm/W	12500	3000-5700K	120°	100-277 MV*	IP65	Photocell, 0-10V Dimming motion sensor	CUL, ETL	16.93" x 16.54" x 13.39"	Y
	ECO-IGQ-120W-FL	129 lm/W	15480	3000-5700K	120°	100-277 MV*	IP65	Photocell, 0-10V Dimming motion sensor	CUL, ETL	16.93" x 16.54" x 13.39"	Y
	ECO-IGQ-120W-FL-H.O.	120 lm/W	14400	3000-5700K	120°	100-277 MV*	IP65	Photocell, 0-10V Dimming motion sensor	CUL, ETL	16.93" x 16.54" x 13.39"	N
Zenith Series Flood Fixtures 	ECO-MEZ-07-40W-FL	143 lm/W	5720	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	21.11" x 8.47" x 2.46"	Y
	ECO-MEZ-07-70W-FL	140 lm/W	9800	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	21.11" x 8.47" x 2.46"	Y
	ECO-MEZ-07-100W-FL	139 lm/W	13900	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	21.11" x 8.47" x 2.46"	Y
	ECO-MEZ-07-150W-FL	139 lm/W	20850	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	23.63" x 12.25" x 3.35"	Y
	ECO-MEZ-07-200W-FL	130 lm/W	26000	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	23.63" x 12.25" x 3.35"	Y
	ECO-MEZ-07-250W-FL	141 lm/W	35250	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	31.77" x 12.25" x 3.35"	Y
	ECO-MEZ-07-300W-FL	137 lm/W	41100	3000-5700K	Type III, IV	100-277 MV*	IP65	0-10V DIMMING	CUL, DLC	31.77" x 12.25" x 3.35"	Y





FLOOD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>North Star Arena & Stadium Flood Fixture</p> 	ECO-LSNS-SL-100W	160 lm/W	16000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	12.13" x 9.45" x 2.95"	N
	ECO-LSNS-SL-150W	160 lm/W	24000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	12.13" x 12" x 2.95"	N
	ECO-LSNS-SL-200W	160 lm/W	32000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	16.06" x 12" x 2.95"	N
	ECO-LSNS-SL-240W	160 lm/W	38400	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	14.09" x 14.57" x 2.95"	N
	ECO-LSNS-SL-300W	160 lm/W	48000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	18.03" x 14.57" x 2.95"	N
	ECO-LSNS-SL-400W	160 lm/W	64000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	18.03" x 17.13" x 2.95"	N
	ECO-LSNS-SL-500W	160 lm/W	80000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	21.97" x 17.13" x 2.95"	N
	ECO-LSNS-SL-600W	160 lm/W	96000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	25.91" x 17.13" x 2.95"	N
	ECO-LSNS-SL-720W	160 lm/W	115200	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	25.91" x 19.69" x 2.95"	N
	ECO-LSNS-SL-840W	160 lm/W	134400	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	29.84" x 19.69" x 2.95"	N
	ECO-LSNS-SL-900W	160 lm/W	144000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	31.81" x 19.69" x 2.95"	N
	ECO-LSNS-SL-1000W	160 lm/W	160000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	27.87" x 24.80" x 2.95"	N
<p>Large Flood Fixtures</p> 	ECO-MFD-70W-04	127 lm/W	8890	3000-5700K	110°	100-277 MV*	IP66	NON DIMMABLE	ETL, CE, FCC	17.06" x 8.46" x 2.46"	Y
	ECO-MFD-105W-04	115 lm/W	12075	3000-5700K	110°	100-277 MV*	IP66	NON DIMMABLE	ETL, CE, FCC	17.06" x 8.46" x 2.46"	Y
	ECO-MFD-150W-04	120 lm/W	18000	3000-5700K	110°	100-277 MV*	IP66	NON DIMMABLE	ETL, CE, FCC	19.07" x 12.24" x 2.46"	Y
	ECO-MFD-200W-04	120 lm/W	24000	3000-5700K	110°	100-277 MV*	IP66	NON DIMMABLE	ETL, CE, FCC	19.07" x 12.24" x 2.46"	Y
	ECO-MFD-300W-04	133 lm/W	39900	3000-5700K	110°	100-277 MV*	IP66	NON DIMMABLE	ETL, CE, FCC	27.72" x 12.24" x 2.46"	Y
<p>Aurora Fixture</p> 	ECO-AURO-FLE450W-AL	135 lm/W	60750	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	30.16" x 24.98" x 2.76"	N
	ECO-AURO-FLE600W-AL	135 lm/W	81000	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	34.84" x 24.98" x 2.76"	N
	ECO-AURO-FLE750W-AL	135 lm/W	101250	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	41.93" x 24.98" x 2.76"	N
	ECO-AURO-FLE900W-AL	135 lm/W	121500	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	46.65" x 24.98" x 2.76"	N
<p>Magic Square Industrial Flood</p> 	ECO-TYF36-MS-120W	130 lm/W	15600	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	11.81" x 12.60" x 9.29"	N
	ECO-TYF36-MS-180W	130 lm/W	23400	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	15.35" x 12.60" x 9.29"	N
	ECO-TYF36-MS-240W	130 lm/W	31200	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
	ECO-TYF36-MS-300W	130 lm/W	39000	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
	ECO-TYF36-MS-500W	130 lm/W	65000	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
	ECO-TYF36-MS-1000W	130 lm/W	130000	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N






FLOOD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Polaris High Power Fixture 150 lm/W 	ECO-RONO-HP-100W	150 lm/W	15000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 10.87" x 3.35"	N
	ECO-RONO-HP-150W	150 lm/W	22500	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 11.81" x 3.35"	N
	ECO-RONO-HP-200W	150 lm/W	30000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 14.84" x 3.35"	N
	ECO-RONO-HP-250W	150 lm/W	37500	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 18.9" x 3.35"	N
	ECO-RONO-HP-300W	150 lm/W	45000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 20.9" x 3.35"	N
	ECO-RONO-HP-400W	150 lm/W	60000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 15.98" x 3.35"	N
	ECO-RONO-HP-500W	150 lm/W	75000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 18.9" x 3.35"	N
	ECO-RONO-HP-600W	150 lm/W	90000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 22.05" x 3.35"	N
	ECO-RONO-HP-800W	150 lm/W	120000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 28.15" x 3.35"	N
	ECO-RONO-HP-1000W	150 lm/W	150000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 34.17" x 3.35"	N
Billboard & Wall Washer Floods 	ECO-CGA-FL-100W	130 lm/W	13000	3000-5700K	65°x120°	100-277 MV*	IP66	0-10V DIMMING	UL, DLC	15.83" x 17.24" x 4.37"	N
	ECO-CGA-FL-150W	120 lm/W	18000	3000-5700K	65°x120°	100-277 MV*	IP66	0-10V DIMMING	UL, DLC	15.83" x 17.24" x 4.37"	N
	ECO-CGA-FL-200W	120 lm/W	24000	3000-5700K	65°x120°	100-277 MV*	IP66	0-10V DIMMING	UL, DLC	15.83" x 17.24" x 4.37"	N
	ECO-CGA-FL-240W	110 lm/W	26400	3000-5700K	65°x120°	100-277 MV*	IP66	0-10V DIMMING	UL, DLC	15.83" x 17.24" x 4.37"	N
Gama Series Flood Fixture 	ECO-ALFA-FLA60W-SL	135 lm/W	8100	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	8.27" x 13.58" x 4.41"	N
	ECO-ALFA-FLA90W-SL	135 lm/W	12150	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	10.63" x 13.58" x 4.41"	N
	ECO-ALFA-FLA120W-SL	135 lm/W	16200	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	12.99" x 13.58" x 4.41"	N
	ECO-ALFA-FLA150W-SL	135 lm/W	20250	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	15.35" x 13.58" x 4.41"	N
	ECO-ALFA-FLA180W-SL	135 lm/W	24300	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	20.08" x 13.58" x 4.41"	N
	ECO-ALFA-FLA210W-SL	135 lm/W	28350	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	22.44" x 13.58" x 4.41"	N
	ECO-ALFA-FLA240W-SL	135 lm/W	32400	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	24.80" x 13.58" x 4.41"	N
	ECO-ALFA-FLA270W-SL	135 lm/W	36450	3000-5700K	25°,40°,60°,90°,120°	100-277 MV*	IP67	0-10V DIMMING	UL, CUL, DLC, CE	27.17" x 13.58" x 4.41"	N
Gamut High Output RGBW Flood Fixture 	ECO-GLED-GHO-50W-FL	46 lm/W	2300	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	11.30" x 9.49" x 3.82"	N
	ECO-GLED-GHO-100W-FL	45 lm/W	4500	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	13.11" x 11.42" x 3.90"	N
	ECO-GLED-GHO-120W-FL	44 lm/W	5280	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	13.98" x 16.34" x 5.04"	N
	ECO-GLED-GHO-180W-FL	45 lm/W	8100	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	19.96" x 16.34" x 4.96"	N
	ECO-GLED-GHO-240W-FL	44 lm/W	10560	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	25.98" x 16.34" x 5.04"	N






FLOOD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Radiant Shoe Box Fixture 	ECO-GI-RAD-65W-6SB	120 lm/W	7800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	14.13" x 10.83" x 3.35"	Y
	ECO-GI-RAD-105W-6SB	110 lm/W	11550	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	14.13" x 10.83" x 3.35"	Y
	ECO-GI-RAD-140W-6SB	115 lm/W	16100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	14.13" x 10.83" x 3.35"	Y
	ECO-GI-RAD-210W-6SB	120 lm/W	25200	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	18.27" x 15.75" x 4.17"	N
	ECO-GI-RAD-300W-6SB	116 lm/W	34800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP65	0-10 DIMMING	UL, CUL, DLC Premium	18.27" x 15.75" x 4.17"	Y
Super Nova G-IV Sports Light 	ECO-GISN-G-IV-240W-SL	153 lm/W	36720	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-320W-SL	153 lm/W	48960	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-410W-SL	147 lm/W	60270	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-480W-SL	142 lm/W	68160	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-535W-SL	137 lm/W	73295	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-600W-SL	148 lm/W	88800	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	19.06" x 18.98" x 7.60"	N
	ECO-GISN-G-IV-735W-SL	142 lm/W	104370	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	19.06" x 18.98" x 7.60"	N
	ECO-GISN-G-IV-790W-SL	138 lm/W	109020	3000-6000K	16°, 40°, 60°, 90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	19.06" x 18.98" x 7.60"	N
	ECO-GISN-G-IV-937W-SL	148 lm/W	138676	3000-6000K	16°, 40°, 60°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
	ECO-GISN-G-IV-1080W-SL	144 lm/W	155520	3000-6000K	16°, 40°, 60°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
	ECO-GISN-G-IV-1200W-SL	142 lm/W	170400	3000-6000K	16°, 40°, 60°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
	ECO-GISN-G-IV-1420W-SL	141 lm/W	200220	3000-6000K	16°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
Hyper Cool Extreme Temp Flood 	ECO-ELITE-HT-50W-FL	130 lm/W	6500	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	10.7" x 14.4" x 9.6"	N
	ECO-ELITE-HT-100W-FL	130 lm/W	13000	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	12.1" x 14.4" x 9.6"	N
	ECO-ELITE-HT-150W-FL	130 lm/W	19500	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	15.8" x 14.4" x 9.6"	N
	ECO-ELITE-HT-200W-FL	130 lm/W	26000	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	19.5" x 14.4" x 9.6"	N
	ECO-ELITE-HT-300W-FL	130 lm/W	39000	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	26.9" x 14.4" x 9.6"	N
	ECO-ELITE-HT-450W-FL	130 lm/W	58500	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	38.0" x 14.4" x 9.6"	N
Beta Luma Flood Fixtures 	ECO-MEZ-08-15W-BLF	133 lm/W	1995	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	5.98" x 6.56" x 2.55"	Y
	ECO-MEZ-08-27W-BLF	133 lm/W	3591	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	5.98" x 6.56" x 2.55"	Y
	ECO-MEZ-08-45W-BLF	126 lm/W	5670	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	8.47" x 6.56" x 3.12"	Y
	ECO-MEZ-08-60W-BLF	124 lm/W	7440	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	8.47" x 6.56" x 3.12"	Y
	ECO-MEZ-08-70W-BLF	127 lm/W	8890	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	11.06" x 14.21" x 4.9"	Y
	ECO-MEZ-08-100W-BLF	133 lm/W	13300	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	11.06" x 14.21" x 4.9"	Y
	ECO-MEZ-08-135W-BLF	133 lm/W	17955	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	14.53" x 16.73" x 4.37"	Y
	ECO-MEZ-08-200W-BLF	131 lm/W	26200	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	14.53" x 16.73" x 4.37"	Y



GAS STATION & CANOPY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Constellation Surface Mounted Parking Garage Fixture 	ECO-MEZ-MCP06-27W-CF	131 lm/W	3537	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-45W-CF	122 lm/W	5490	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-48W-CF	125 lm/W	6000	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-60W-CF	127 lm/W	7620	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-90W-CF	129 lm/W	11610	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
Petro Gen Fixture 	ECO-HC-LCP-100W-GC	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.85" x 15.50" x 1.76"	N
	ECO-HC-LCP-130W-GC	120 lm/W	15600	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.85" x 15.50" x 1.76"	Y
	ECO-HC-LCP-150W-GC	120 lm/W	18000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.85" x 15.50" x 1.76"	Y
Supra Petro Fixture 	ECO-SUPRA-CAA60W-CF	135 lm/W	8100	3000-5000K	25°, 40°, 60°, 90°, 120°	120-277 MV	IP54	0-10V DIMMING	UL, CUL, DLC, CE	9.45" x 14.17" x 4.84"	N
	ECO-SUPRA-CAA90W-CF	135 lm/W	12150	3000-5000K	25°, 40°, 60°, 90°, 120°	120-277 MV	IP54	0-10V DIMMING	UL, CUL, DLC, CE	9.45" x 14.17" x 4.84"	N
	ECO-SUPRA-CAA120W-CF	135 lm/W	16200	3000-5000K	25°, 40°, 60°, 90°, 120°	120-277 MV	IP54	0-10V DIMMING	UL, CUL, DLC, CE	11.81" x 14.17" x 4.84"	N
	ECO-SUPRA-CAA150W-CF	135 lm/W	20250	3000-5000K	25°, 40°, 60°, 90°, 120°	120-277 MV	IP54	0-10V DIMMING	UL, CUL, DLC, CE	14.17" x 14.17" x 4.84"	N
High Octane Surface Mounted Canopy Fixture 	ECO-CNS-HO-150W-CL	132 lm/W	19800	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	20.47" x 20.47" x 9.65"	N
	ECO-CNS-HO-180W-CL	139 lm/W	25020	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	20.47" x 20.47" x 9.65"	N
	ECO-CNS-HO-240W-CL	133 lm/W	31920	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	20.47" x 20.47" x 9.65"	N
Super Octane Surface Mounted Canopy Fixture 	ECO-RISESO-160W-GSCF	120 lm/W	19200	4000-6500K	120°	100-277 MV	IP66	Dimmable (3 in 1) 1-10VDC/PWM/Resistor	UL, CUL, DLC	21.65" x 21.65" x 1.18"	N
	ECO-RISESO-200W-GSCF	120 lm/W	24000	4000-6500K	120°	100-277 MV	IP66	Dimmable (3 in 1) 1-10VDC/PWM/Resistor	UL, CUL, DLC	21.65" x 21.65" x 1.18"	N
	ECO-RISESO-240W-GSCF	120 lm/W	28800	4000-6500K	120°	100-277 MV	IP66	Dimmable (3 in 1) 1-10VDC/PWM/Resistor	UL, CUL, DLC	21.65" x 21.65" x 1.18"	N





GAS STATION & CANOPY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Octane Plus Recessed Canopy Fixture 	ECO-RKOP-GS-80W-RC	140 lm/W	11200	3000-5000K	30°,60°,90°,150°	90-277 MV	IP65	0-10V DIMMING	DLC, ETL, CE	13.7" x 13.7" x 4.33"	Y
	ECO-RKOP-GS-100W-RC	140 lm/W	14000	3000-5000K	30°,60°,90°,150°	90-277 MV	IP65	0-10V DIMMING	DLC, ETL, CE	13.7" x 13.7" x 4.33"	Y
	ECO-RKOP-GS-120W-RC	140 lm/W	16800	3000-5000K	30°,60°,90°,150°	90-277 MV	IP65	0-10V DIMMING	DLC, ETL, CE	13.7" x 13.7" x 4.33"	Y
	ECO-RKOP-GS-150W-RC	140 lm/W	21000	3000-5000K	30°,60°,90°,150°	90-277 MV	IP65	0-10V DIMMING	DLC, ETL, CE	13.7" x 13.7" x 4.33"	Y
Petro Shine 	ECO-SHINE-CLA120W-CF	135 lm/W	16200	3000-5000K	25°,40°,60°,90°,120°	120-277 MV	IP67	0-10V DIMMING	UL, CUL, DLC, CE	15.75" x 15.75" x 2.89"	N
	ECO-SHINE-CLA160W-CF	135 lm/W	16200	3000-5000K	25°,40°,60°,90°,120°	120-277 MV	IP67	0-10V DIMMING	UL, CUL, DLC, CE	15.75" x 15.75" x 2.89"	N
Walkway Surface Mounted Canopy Fixtures 	ECO-DEL-NCP-45W	111 lm/W	5550	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	10.60" x 10.60" x 2.98"	Y
	ECO-DEL-NCP-75W	109 lm/W	8175	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	10.60" x 10.60" x 2.98"	Y
Guardian Canopy Fixture 	ECO-GICF-20W-SM	126 lm/W	2520	3000-5000K	160°	100-277 MV	IP65	0-10V DIMMING	UL, CUL	9.8" x 9.8" x 3.4"	Y
	ECO-GICF-30W-SM	126 lm/W	3780	3000-5000K	160°	100-277 MV	IP65	0-10V DIMMING	UL, CUL	9.8" x 9.8" x 3.4"	Y
	ECO-GICF-40W-SM	126 lm/W	5040	3000-5000K	160°	100-277 MV	IP65	0-10V DIMMING	UL, CUL	9.8" x 9.8" x 3.4"	Y
	ECO-GICF-55W-SM	126 lm/W	6930	3000-5000K	160°	100-277 MV	IP65	0-10V DIMMING	UL, CUL	9.8" x 9.8" x 3.4"	Y
	ECO-GICF-80W-SM	126 lm/W	10080	3000-5000K	160°	100-277 MV	IP65	0-10V DIMMING	UL, CUL	9.8" x 9.8" x 3.4"	Y
Bravo Surface Mounted Down Light 	ECO-BL-CNPY-50W-S	120 lm/W	6000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	8.86" x 8.86" x 3.94"	N
	ECO-BL-CNPY-75W-S	120 lm/W	9000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	8.86" x 8.86" x 3.94"	N
	ECO-BL-CNPY-100W-S	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	12.40" x 12.40" x 4.53"	N
	ECO-BL-CNPY-120W-S	120 lm/W	14400	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	12.40" x 12.40" x 4.53"	N
	ECO-BL-CNPY-50W-R	120 lm/W	6000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	11.42" x 4.53"	N
	ECO-BL-CNPY-75W-R	120 lm/W	9000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	11.42" x 4.53"	N
	ECO-BL-CNPY-100W-R	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.16" x 4.57"	N
	ECO-BL-CNPY-120W-R	120 lm/W	14400	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.16" x 4.57"	N





GAS STATION & CANOPY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Nautic Star Bulkhead & Canopy Fixture 	ECO-NSTAR-18W-PC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-18W-HC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-18W-CC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-18W-GC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-28W-PC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
	ECO-NSTAR-28W-HC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
	ECO-NSTAR-28W-CC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
	ECO-NSTAR-28W-GC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
Ultra-Thin Series Canopy Fixture 	ECO-ULTRA-MES-45W	90 lm/W	4050	3000-5000K	60°,90°,120°	120-277 MV	IP65	0-10V DIMMING	UL, DLC	10.65" x 10.65" x 2.30	Y
	ECO-ULTRA-MES-65W	102 lm/W	6630	3000-5000K	60°,90°,120°	120-277 MV	IP65	0-10V DIMMING	UL, DLC	10.65" x 10.65" x 2.30	Y
	ECO-ULTRA-MES-70W	84 lm/W	5880	3000-5000K	60°,90°,120°	120-277 MV	IP65	0-10V DIMMING	UL, DLC	10.65" x 10.65" x 2.30	Y





HIGH BAY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Sky Bay II Pendant Fixture 150 lm/w 	ECO-SBHB-150W	150 lm/W	22500	3000-5700K	60°,110°	100-277 MV*	IP65	1-10 Dimmable & Non Dimmable Versions	UL, DLC	12.60" x 7.68"	Y
	ECO-SBHB-180W	150 lm/W	27000	3000-5700K	60°,110°	100-277 MV*	IP65	1-10 Dimmable & Non Dimmable Versions	UL, DLC	14.37" x 7.87"	Y
	ECO-SBHB-200W	150 lm/W	30000	3000-5700K	60°,110°	100-277 MV*	IP65	1-10 Dimmable & Non Dimmable Versions	UL, DLC	14.37" x 7.87"	Y
	ECO-SBHB-240W	150 lm/W	36000	3000-5700K	60°,110°	100-277 MV*	IP65	1-10 Dimmable & Non Dimmable Versions	UL, DLC	15.75" x 8.58"	Y
Supernova High Output Pendant Fixture 	ECO-SLHB-70W-SN	190 lm/W	13300	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	11.38" x 6.93"	N
	ECO-SLHB-90W-SN	190 lm/W	17100	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	11.38" x 6.93"	N
	ECO-SLHB-110W-SN	190 lm/W	20900	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	11.38" x 6.93"	N
	ECO-SLHB-150W-SN	190 lm/W	28500	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N
	ECO-SLHB-200W-SN	190 lm/W	38000	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N
	ECO-SLHB-240W-SN	190 lm/W	45600	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N
	ECO-SLHB-260W-SN	190 lm/W	49400	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N
	ECO-SLHB-280W-SN	190 lm/W	53200	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N
	ECO-SLHB-300W-SN	190 lm/W	57000	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N
ECO-SLHB-320W-SN	190 lm/W	60800	3000-5700K	60°,90°,120°	180-528 MV	IP65	0-10V DIMMING, LIGHT HARVESTING, MOTION & ZIGBEE CAPABLE	CUL, DLC, CE	12.8" x 7.36"	N	
Big Bang High Temp High Bay Fixture 	ECO-HL-BBHT-200W-HB	140 lm/W	28000	3000K/4000K/5000K/5700K	30° / 60°	100-277 MV*	IP65		UL, CE	24.80" x 21.65"	N
	ECO-HL-BBHT-300W-HB	140 lm/W	42000	3000K/4000K/5000K/5700K	30° / 60°	100-277 MV*	IP65		UL, CE	24.80" x 21.65"	N
	ECO-HL-BBHT-400W-HB	140 lm/W	56000	3000K/4000K/5000K/5700K	30° / 60°	100-277 MV*	IP65		UL, CE	24.80" x 21.65"	N
	ECO-HL-BBHT-500W-HB	140 lm/W	70000	3000K/4000K/5000K/5700K	30° / 60°	100-277 MV*	IP65		UL, CE	24.80" x 21.65"	N
	ECO-HL-BBHT-600W-HB	140 lm/W	84000	3000K/4000K/5000K/5700K	30° / 60°	100-277 MV*	IP65		UL, CE	24.80" x 21.65"	N
	ECO-HL-BBHT-750W-HB	140 lm/W	105000	3000K/4000K/5000K/5700K	30° / 60°	100-277 MV*	IP65		UL, CE	24.80" x 21.65"	N
Lunar 4 Module High Bay Fixture 	ECO-GCO-100W-MHB	150 lm/W	15000	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-150W-MHB	150 lm/W	22500	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-200W-MHB	150 lm/W	30000	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-240W-MHB	150 lm/W	36000	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 6.3"	N
	ECO-GCO-300W-MHB	150 lm/W	45000	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 8.86"	N
	ECO-GCO-400W-MHB	150 lm/W	60000	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 8.86"	N
	ECO-GCO-480W-MHB	150 lm/W	72000	2700-6500K	30°,60°,90°,120°	100-277 MV	IP65	0-10V Dimming, Zigbee Remote, OC & PIR Sensors	DLC, ETL, CE	16.89" x 16.89" x 8.86"	N

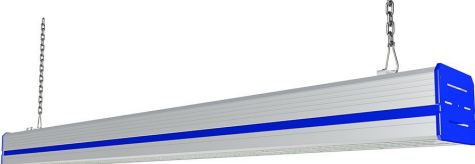
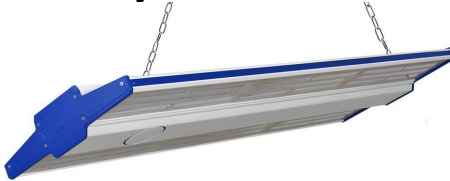


HIGH BAY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Halo Sanitation Fixture 	ECO-GCOM-HALO-50W-F	160 lm/W	8000	3000-5700K	60°,90°,120°	100-277 MV	IP69	0-10V dimmable	DLC, ETL, CE	2.48" x 14.96"	N
	ECO-GCOM-HALO-80W-F	160 lm/W	12800	3000-5700K	60°,90°,120°	100-277 MV	IP69	0-10V dimmable	DLC, ETL, CE	2.48" x 14.96"	N
	ECO-GCOM-HALO-100W-F	160 lm/W	16000	3000-5700K	60°,90°,120°	100-277 MV	IP69	0-10V dimmable	DLC, ETL, CE	2.48" x 14.96"	N
	ECO-GCOM-HALO-150W-F	160 lm/W	24000	3000-5700K	60°,90°,120°	100-277 MV	IP69	0-10V dimmable	DLC, ETL, CE	2.48" x 14.96"	N
	ECO-GCOM-HALO-200W-F	160 lm/W	32000	3000-5700K	60°,90°,120°	100-277 MV	IP69	0-10V dimmable	DLC, ETL, CE	2.68" x 19.69"	N
	ECO-GCOM-HALO-240W-F	160 lm/W	38400	3000-5700K	60°,90°,120°	100-277 MV	IP69	0-10V dimmable	DLC, ETL, CE	2.68" x 19.69"	N
Super Hero High Output High Bay 	ECO-HERO-100W-07-H.O.	180 lm/W	18000	3000-6000K	110°	100-277 MV*	IP65	1-10V dimmable	UL, CE	11.02" x 7.40"	N
	ECO-HERO-150W-07-H.O.	180 lm/W	27000	3000-6000K	110°	100-277 MV*	IP65	1-10V dimmable	UL, CE	11.02" x 7.40"	N
	ECO-HERO-200W-07-H.O.	180 lm/W	36000	3000-6000K	110°	100-277 MV*	IP65	1-10V dimmable	UL, CE	12.60" x 7.40"	N
Sky Bay Hi Temp High Bay Fixture 	ECO-SBHT-150W-06-COOL	140 lm/W	21000	3000-6000K	110°	100-277 MV*	IP65	1-10V dimmable, DALI dimmable	UL, CUL, DLC, CE	14.37" x 7.09"	N
	ECO-SBHT-200W-06-COOL	140 lm/W	28000	3000-6000K	110°	100-277 MV*	IP65	1-10V dimmable, DALI dimmable	UL, CUL, DLC, CE	15.75" x 7.76"	N
	ECO-SBHT-260W-06-COOL	140 lm/W	36400	3000-6000K	110°	100-277 MV*	IP65	1-10V dimmable, DALI dimmable	UL, CUL, DLC, CE	15.75" x 7.76"	N
Clean Lume Dust Free Fixture 160 Im/w 	ECO-CGA-HCDF-100W	130 lm/W	13000	3000-5700K	50°,90°,120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	19.25" x 7.87"	N
	ECO-CGA-HCDF-120W	130 lm/W	15600	3000-5700K	50°,90°,120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	19.25" x 7.87"	N
	ECO-CGA-HCDF-150W	130 lm/W	19500	3000-5700K	50°,90°,120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	19.25" x 7.87"	N
	ECO-CGA-HCDF-200W	130 lm/W	26000	3000-5700K	50°,90°,120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	19.25" x 7.87"	N




HIGH BAY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Comet Linear Pendant Fixture 130 lm/w 	ECO-TYF-20-100W	130 lm/W	13000	3000-5700K	120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	35.63" x 5.31" x 2.83"	N
	ECO-TYF-20-150W	130 lm/W	19500	3000-5700K	120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	47.44" x 5.31" x 2.83"	N
	ECO-TYF-20-200W	130 lm/W	26000	3000-5700K	120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	59.25" x 5.31" x 2.83"	N
Comet High Output Linear Pendant Fixture 150 lm/w 	ECO-TYF-20HO-100W	150 lm/W	15000	3000-5700K	120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	35.63" x 5.31" x 2.83"	N
	ECO-TYF-20HO-150W	150 lm/W	22500	3000-5700K	120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	47.44" x 5.31" x 2.83"	N
	ECO-TYF-20HO-200W	150 lm/W	30000	3000-5700K	120°	100-277 MV*	IP65	0-10V DIMMING, ZIGBEE REMOTE	UL, DLC	59.25" x 5.31" x 2.83"	N
Galactic Linear Pendant Fixture 	ECO-GF7-100W	150 lm/W	15000	3000-5700K	120°	100-277 MV*	IP65	1-10V DIMMING, DALI, ZIGBEE, OC SENSOR	DLC Premium, ETL	23.62" x 6.77" x 3.66"	N
	ECO-GF7-150W	150 lm/W	22500	3000-5700K	120°	100-277 MV*	IP65	1-10V DIMMING, DALI, ZIGBEE, OC SENSOR	DLC Premium, ETL	35.43" x 6.77" x 3.66"	N
	ECO-GF7-200W	150 lm/W	30000	3000-5700K	120°	100-277 MV*	IP65	1-10V DIMMING, DALI, ZIGBEE, OC SENSOR	DLC Premium, ETL	47.24" x 6.77" x 3.66"	N
	ECO-GF7-240W	150 lm/W	36000	3000-5700K	120°	100-277 MV*	IP65	1-10V DIMMING, DALI, ZIGBEE, OC SENSOR	DLC Premium, ETL	59.06" x 6.77" x 3.66"	N
Everest Summit High Bay 	ECO-EVSUM-100W-K5-HB	152 lm/W	15200	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	12.52" x 11.77" x 1.59"	N
	ECO-EVSUM-150W-K5-HB	152 lm/W	22800	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	12.52" x 11.77" x 1.59"	N
	ECO-EVSUM-200W-K5-HB	152 lm/W	30400	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	24.13" x 11.77" x 1.59"	N
	ECO-EVSUM-250W-K5-HB	152 lm/W	38000	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	24.13" x 11.77" x 1.59"	N
	ECO-EVSUM-300W-K5-HB	152 lm/W	45600	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	35.75" x 11.77" x 1.59"	N
	ECO-EVSUM-400W-K5-HB	152 lm/W	60800	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	47.36" x 11.77" x 1.59"	N
	ECO-EVSUM-500W-K5-HB	152 lm/W	76000	3000-5700K	60°,90°,120°	100-277 MV*	IP54	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	CUL, DLC	47.36" x 11.77" x 1.59"	N

HIGH BAY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Everest A1 Series High Output Linear Pendant Fixture 170 lm/w 	ECO-EVHB-50W-A1	170 lm/W	8500	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	12" x 4.8" x 3.74"	N
	ECO-EVHB-100W-A1	170 lm/W	17000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	23.62" x 4.8" x 3.74"	N
	ECO-EVHB-150W-A1	170 lm/W	25500	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	35.23" x 4.8" x 3.74"	N
	ECO-EVHB-200W-A1	170 lm/W	34000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	46.85" x 4.8" x 3.74"	N
	ECO-EVHB-250W-A1	170 lm/W	42500	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	46.85" x 4.8" x 3.74"	N
Everest A2 Series High Output High Bay Panel 170 lm/w 	ECO-EVHB-100W-A2	170 lm/W	17000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	11.81" x 12.6" x 3.15"	N
	ECO-EVHB-150W-A2	170 lm/W	25500	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	11.81" x 12.6" x 3.15"	N
	ECO-EVHB-200W-A2	170 lm/W	34000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	23.62" x 12.6" x 3.15"	N
	ECO-EVHB-250W-A2	170 lm/W	42500	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	23.62" x 12.6" x 3.15"	N
	ECO-EVHB-300W-A2	170 lm/W	51000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	35.24" x 12.6" x 3.15"	N
	ECO-EVHB-360W-A2	170 lm/W	61200	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	35.24" x 12.6" x 3.15"	N
	ECO-EVHB-400W-A2	170 lm/W	68000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	46.85" x 12.6" x 3.15"	N
	ECO-EVHB-500W-A2	170 lm/W	85000	3000-5700K	60°,90°,120°	100-277 MV*	IP66	0-10V DIMMING, ZIGBEE REMOTE, MERRYTEK OC	UL, DLC	46.85" x 12.6" x 3.15"	N
Neutron Low Glare Linear Pendant Fixture 	ECO-TYF-LG-100W-LF	130 lm/W	13000	3000-6000K	80°	100-277 MV*	IP65	1-10V dimmable, DALI	DLC, ETL, CE	23.82" x 5.31" x 2.83"	N
	ECO-TYF-LG-150W-LF	130 lm/W	19500	3000-6000K	80°	100-277 MV*	IP65	1-10V dimmable, DALI	DLC, ETL, CE	35.63" x 5.31" x 2.83"	N
	ECO-TYF-LG-200W-LF	130 lm/W	26000	3000-6000K	80°	100-277 MV*	IP65	1-10V dimmable, DALI	DLC, ETL, CE	47.44" x 5.31" x 2.83"	N
Saturn Eclipse High Bay Fixture 	ECO-SAT-100W-S6	135 lm/W	13500	3000-5700K	60°,90°,120°	100-277 MV*	IP65	NON DIMMABLE	UL, DLC, CE	14.17" x 6.89"	N
	ECO-SAT-150W-S6	135 lm/W	20250	3000-5700K	60°,90°,120°	100-277 MV*	IP65	NON DIMMABLE	UL, DLC, CE	14.17" x 6.89"	N
	ECO-SAT-200W-S6	135 lm/W	27000	3000-5700K	60°,90°,120°	100-277 MV*	IP65	NON DIMMABLE	UL, DLC, CE	16.93" x 8.07"	N



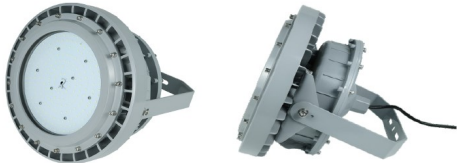
HIGH BAY FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Saturn Aura 	ECO-MEZ-SATARA-100W-HB	140 lm/W	14000	3000-5000K	120	100-277 MV *	IP65	Integrated Motion / Emergency Backup	CUL, DLC	15.56" x 7.08"	N
	ECO-MEZ-SATARA-180W-HB	138 lm/W	24840	3000-5000K	120	100-277 MV *	IP65	Integrated Motion / Emergency Backup	CUL, DLC	15.56" x 7.08"	N
Hyper Cool Extreme Temp High Bay 	ECO-ELITE-HT-50W-HB	130 lm/W	6500	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	10.7" x 14.4" x 9.6"	N
	ECO-ELITE-HT-100W-HB	130 lm/W	13000	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	12.1" x 14.4" x 9.6"	N
	ECO-ELITE-HT-150W-HB	130 lm/W	19500	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	15.8" x 14.4" x 9.6"	N
	ECO-ELITE-HT-200W-HB	130 lm/W	26000	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	19.5" x 14.4" x 9.6"	N
	ECO-ELITE-HT-300W-HB	130 lm/W	39000	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	26.9" x 14.4" x 9.6"	N
	ECO-ELITE-HT-450W-HB	130 lm/W	58500	3000-5500K	Type I, II, III, IV, V	100-277 MV*	IP66	0-10V DIMMING	DLC Premium, ETL, CE	38.0" x 14.4" x 9.6"	N
Meteor High Bay Luminaire Fixture 	ECO-MEZ-03-90W-LHB	140 lm/W	12600	4000-5000K	120° (Others on request)	100-277 MV*	IP66	1-10V Dimming, Wireless Control, Motion Sensor	CUL, DLC Premium	23.92" x 10.3" x 1.83"	Y
	ECO-MEZ-03-130W-LHB	142 lm/W	18460	4000-5000K	120° (Others on request)	100-277 MV*	IP66	1-10V Dimming, Wireless Control, Motion Sensor	CUL, DLC Premium	23.92" x 19.7" x 1.83"	Y
	ECO-MEZ-03-180W-LHB	136 lm/W	24480	4000-5000K	120° (Others on request)	100-277 MV*	IP66	1-10V Dimming, Wireless Control, Motion Sensor	CUL, DLC Premium	23.92" x 19.7" x 1.83"	Y
	ECO-MEZ-03-205W-LHB	141 lm/W	28905	4000-5000K	120° (Others on request)	100-277 MV*	IP66	1-10V Dimming, Wireless Control, Motion Sensor	CUL, DLC Premium	23.92" x 19.7" x 1.83"	Y
	ECO-MEZ-03-270W-LHB	133 lm/W	35910	4000-5000K	120° (Others on request)	100-277 MV*	IP66	1-10V Dimming, Wireless Control, Motion Sensor	CUL, DLC Premium	47.55" x 24.01" x 2.87"	Y
	ECO-MEZ-03-300W-LHB	133 lm/W	39900	4000-5000K	120° (Others on request)	100-277 MV*	IP66	1-10V Dimming, Wireless Control, Motion Sensor	CUL, DLC Premium	47.55" x 24.01" x 2.87"	Y






INDUSTRIAL & PETROCHEMICAL FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>Explosion Proof Eagle Eye I High Bay Fixture</p>  <p>Marking UL844 (North American) & Marking Marine 1598A</p> <p>Class I, Division 2, Groups A,B,C,D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III</p>	ECO-EX-20W-B2YZDA	140 lm/W	2800	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
	ECO-EX-40W-B2YZDA	140 lm/W	5600	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
	ECO-EX-60W-BYZDA	140 lm/W	8400	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	Y
	ECO-EX-80W-BYZDA	140 lm/W	11200	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	Y
	ECO-EX-100W-B3YZDA	140 lm/W	14000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	Y
	ECO-EX-120W-B3YZDA	140 lm/W	16800	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
	ECO-EX-150W-B3YZDA	140 lm/W	21000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	Y
	ECO-EX-200W-B3YZDA	140 lm/W	28000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	Y
	ECO-EX-250W-B3YZDA	140 lm/W	35000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
	ECO-EX-300W-B3YZDA	140 lm/W	42000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
	ECO-EX-350W-B3YZDA	140 lm/W	49000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
	ECO-EX-400W-B3YZDA	140 lm/W	56000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, ETL	14.57" x 7.7"	N
<p>Explosion Proof Jelly Jar Fixture</p>  <p>Marking UL 844 & Marking Marine 1598</p> <p>Class I, Division 1, Groups C,D Class I, Division 2, Groups A,B,C,D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III</p>	ECO-EX-10W-GXYZ	140 lm/W	1400	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.8" x 6.8" x 16.1"	N
	ECO-EX-20W-GXYZ	140 lm/W	2800	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.8" x 6.8" x 16.1"	N
	ECO-EX-30W-GXYZ	140 lm/W	4200	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.8" x 6.8" x 16.1"	Y
	ECO-EX-40W-GXYZ	140 lm/W	5600	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.8" x 6.8" x 16.1"	Y
<p>Explosion Proof Laser Linear High Bay Fixture</p>  <p>Marking UL 844 & Marking Marine 1598A</p> <p>Class I, Division 2, Groups A,B,C,D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III</p>	ECO-EX-20W-H2YZDA	140 lm/W	2800	3000-5000K	120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	23.6" x 4.7"	N
	ECO-EX-40W-H2YZDA	140 lm/W	5600	3000-5000K	120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	23.6" x 4.7"	N
	ECO-EX-40W-H4YZDA	140 lm/W	5600	3000-5000K	120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	47.2" x 4.7"	N
	ECO-EX-60W-H4YZDA	140 lm/W	8400	3000-5000K	120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	47.2" x 4.7"	Y
	ECO-EX-80W-H4YZDA	140 lm/W	11200	3000-5000K	120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	47.2" x 4.7"	N




INDUSTRIAL & PETROCHEMICAL FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>Explosion Proof Night Hawk Flood Fixture</p>  <p>Marking UL844(North American) & UL 1598A</p> <p>Class I, Division 1, Groups C,D Class I, Division 2, Groups A,B,C,D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III</p>	ECO-EX-20W-D2YZDA	140 lm/W	2800	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	N
	ECO-EX-40W-D2YZDA	140 lm/W	5600	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	N
	ECO-EX-60W-D2YZDA	140 lm/W	8400	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	N
	ECO-EX-80W-D2YZDA	140 lm/W	11200	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	N
	ECO-EX-100W-DYZDA	140 lm/W	14000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	Y
	ECO-EX-150W-DYZDA	140 lm/W	21000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	Y
	ECO-EX-200W-DYZDA	140 lm/W	28000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP67	NON DIMMABLE	UL, DLC	15.7" x 11.2" x 9.96"	N
<p>Explosion Proof Night Owl Area Light Fixture</p>  <p>Marking UL 844 & Marking Marine UL 1598A</p> <p>Class I, Division 1, Groups C,D Class I, Division 2, Groups A,B,C,D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III</p>	ECO-EX-20W-EYZDA	140 lm/W	2800	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	13.94" x 11.28"	N
	ECO-EX-40W-EYZDA	140 lm/W	5600	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	13.94" x 11.28"	N
	ECO-EX-60W-EYZDA	140 lm/W	8400	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	13.94" x 11.28"	N
	ECO-EX-80W-EYZDA	140 lm/W	11200	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	13.94" x 11.28"	N
	ECO-EX-100W-EYZDA	140 lm/W	14000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	13.94" x 11.28"	Y
	ECO-EX-150W-EYZDA	140 lm/W	21000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	13.94" x 11.28"	Y
<p>Explosion Proof Sky Hawk High Plus Bay Fixture</p>  <p>Marking UL 844 (North American) & Marking Marine 1598A</p> <p>Class I, Division 1, Groups C,D Class I, Division 2, Groups A,B,C,D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III</p>	ECO-EX-20W-C2YZDA	140 lm/W	2800	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	14.08" x 8.42"	N
	ECO-EX-60W-C2YZDA	140 lm/W	8400	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	14.08" x 8.42"	N
	ECO-EX-80W-C2YZDA	140 lm/W	11200	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	14.08" x 8.42"	N
	ECO-EX-100W-CYZDA	140 lm/W	14000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	14.08" x 8.42"	Y
	ECO-EX-150W-CYZDA	140 lm/W	21000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	14.08" x 8.42"	Y
	ECO-EX-200W-C3YZDA	140 lm/W	28000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	17.44" x 10"	N
	ECO-EX-250W-C3YZDA	140 lm/W	35000	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	17.44" x 10"	N
	ECO-EX-280W-C3YZDA	140 lm/W	39200	3000-5000K	40°,60°,90°,120°	100-277 MV*	IP66	NON DIMMABLE	UL, DLC	17.44" x 10"	N





LANDSCAPING, IN-GROUND & WALL WASHER FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Spectrum One Linear Rainbow Fixture 	ECO-SPEC1-23W-JT	90 lm/W	2070	3000-5000K	15°,30°,40°,15°35°	100-277 MV	IP66	DMX	ETL, CE	21.90" x 3.07" x 4.65"	N
	ECO-SPEC1-45W-JT	90 lm/W	4050	3000-5000K	15°,30°,40°,15°35°	100-277 MV	IP66	DMX	ETL, CE	21.90" x 3.07" x 4.65"	N
Spectrum Two Rainbow Fixture 	ECO-SPEC2-45W-JT	45 lm/W	2025	3000-5000K	15°,30°,40°,15°35°	100-277 MV	IP66	DMX	ETL, CE	13.39" x 2.17" x 7.24"	N
	ECO-SPEC2-45W-JTRR	41 lm/W	1845	3000-5000K	15°,30°,40°,15°35°	100-277 MV	IP66	DMX	ETL, CE	13.39" x 2.17" x 7.24"	N
Genesis Up & Down Column Sconce 	ECO-PRGEN-5W-RCS	100 lm/W	500	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	3.54" x 10.24"	N
	ECO-PRGEN-10W-RCS	100 lm/W	1000	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	3.54" x 10.24"	N
	ECO-PRGEN-15W-RCS	100 lm/W	1500	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	4.33" x 11.81"	N
	ECO-PRGEN-20W-RCS	100 lm/W	2000	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	4.33" x 11.81"	N
	ECO-PRGEN-25W-RCS	100 lm/W	2500	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	5.71" x 11.81"	N
Gemini High Power Up & Down Column Sconce 	ECO-PRHP-GEM-10W	100 lm/W	1000	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	2.56" x 3.95" x 9.06"	N
	ECO-PRHP-GEM-12W	100 lm/W	1200	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	2.56" x 3.95" x 9.06"	N
	ECO-PRHP-GEM-18W	100 lm/W	1800	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	4.33" x 11.81"	N
	ECO-PRHP-GEM-24W	100 lm/W	2400	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	4.33" x 11.81"	N
	ECO-PRHP-GEM-36W	100 lm/W	3600	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	5.71" x 11.81"	N
	ECO-PRHP-GEM-48W	100 lm/W	4800	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	6.30" x 11.81"	N
	ECO-PRHP-GEM-72W	100 lm/W	7200	3000-6500K	15°,25°,45°,60°,90°,120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	7.09" x 11.81"	N
Mini & Landscape Flood Fixtures 	ECO-MFD02-20W-BLF	125 lm/W	2500	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.84" x 5.97"	Y
	ECO-MFD02-30W-BLF	112 lm/W	3360	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	6.84" x 5.97"	Y
	ECO-MFD03-15W-MLF	100 lm/W	1500	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	4.72" x 2.95" x 1.27"	Y
	ECO-MFD03-30W-MLF	100 lm/W	3000	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	7.08" x 4.42" x 1.61"	Y
	ECO-MFD03-45W-MLF	118 lm/W	5310	3000-5000K		100-277 MV*	IP66	NON DIMMABLE	UL, DLC	8.26" x 5.15" x 2"	Y





LANDSCAPING, IN-GROUND & WALL WASHER FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Pulsar Flood Fixtures 	ECO-CK-PULSAR-20W-FL	130 lm/W	2600	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	8.11" x 9.49" x 2.93"	N
	ECO-CK-PULSAR-30W-FL	130 lm/W	3900	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	8.11" x 9.49" x 2.93"	Y
	ECO-CK-PULSAR-50W-FL	130 lm/W	6500	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	10.75" x 11.57" x 3.73"	Y
	ECO-CK-PULSAR-70W-FL	130 lm/W	9100	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	10.75" x 11.57" x 3.73"	Y
	ECO-CK-PULSAR-80W-FL	130 lm/W	10400	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	N
	ECO-CK-PULSAR-100W-FL	130 lm/W	13000	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	N
	ECO-CK-PULSAR-120W-FL	130 lm/W	15600	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	Y
	ECO-CK-PULSAR-150W-FL	130 lm/W	19500	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	14.41" x 17.06" x 4.91"	Y
	ECO-CK-PULSAR-200W-FL	130 lm/W	26000	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	18.82" x 20.43" x 5.56"	N
	ECO-CK-PULSAR-240W-FL	130 lm/W	31200	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	18.82" x 20.43" x 5.56"	N
ECO-CK-PULSAR-300W-FL	130 lm/W	39000	3000-5700K	NEMA 7x6, 5x5, 3x3	100-277 MV*	IP67	1-10V Dimming	DLC Premium, ETL	18.82" x 20.43" x 5.56"	N	
Beta Luma Flood Fixtures 	ECO-MEZ-08-15W-BLF	133 lm/W	1995	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	5.98" x 6.56" x 2.55"	Y
	ECO-MEZ-08-27W-BLF	133 lm/W	3591	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	5.98" x 6.56" x 2.55"	Y
	ECO-MEZ-08-45W-BLF	126 lm/W	5670	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	8.47" x 6.56" x 3.12"	Y
	ECO-MEZ-08-60W-BLF	124 lm/W	7440	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	8.47" x 6.56" x 3.12"	Y
	ECO-MEZ-08-70W-BLF	127 lm/W	8890	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	11.06" x 14.21" x 4.9"	Y
	ECO-MEZ-08-100W-BLF	133 lm/W	13300	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	11.06" x 14.21" x 4.9"	Y
	ECO-MEZ-08-135W-BLF	133 lm/W	17955	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	14.53" x 16.73" x 4.37"	Y
ECO-MEZ-08-200W-BLF	131 lm/W	26200	3000-5000K	110°	100-277 MV*	IP66		CUL, DLC, FCC	14.53" x 16.73" x 4.37"	Y	
Gamut High Output RGBW Flood Fixture 	ECO-GLED-GHO-50W-FL	46 lm/W	2300	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	11.30" x 9.49" x 3.82"	N
	ECO-GLED-GHO-100W-FL	45 lm/W	4500	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	13.11" x 11.42" x 3.90"	N
	ECO-GLED-GHO-120W-FL	44 lm/W	5280	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	13.98" x 16.34" x 5.04"	N
	ECO-GLED-GHO-180W-FL	45 lm/W	8100	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	19.96" x 16.34" x 4.96"	N
	ECO-GLED-GHO-240W-FL	44 lm/W	10560	5000K	30°, 60°, 60°x135°, 85°x135°	100-277 MV*	IP65	DMX512 two-way communication, Address management, 0-100% Dimming	CE	25.98" x 16.34" x 5.04"	N




LINEAR SURFACE & PENDANT FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Surface Mounted Wrap Fixture 	ECO-YZ-PATS-4FTL-30W	120 lm/W	3600	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	50" x 9.5" x 7.28"	Y
	ECO-YZ-PATS-4FTL-36W	120 lm/W	4320	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	50" x 9.5" x 7.28"	Y
	ECO-YZ-PATS-4FTL-42W	120 lm/W	5040	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	50" x 9.5" x 7.28"	Y
Linear Surface or Pendant Mounted Fixture 	ECO-YZ-TS4FT-24W	120 lm/W	2880	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	48" x 3.35" x 3.56"	N
	ECO-YZ-TS4FT-40W	120 lm/W	4800	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	96" x 3.35" x 3.56"	Y
	ECO-YZ-TS8FT-60W	120 lm/W	8160	3000-5000K	110°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	96" x 3.35" x 3.56"	Y
Intergalactic Indirect Suspended Strip Fixture 	ECO-LITE-ISS-42W-SF	120 lm/W	5040	3000K-5000K		100-277 MV*	IP65	0-10 Volt Dimmable	DLC, ETL	48" x 10.974" x 8.21"	N
	ECO-LITE-ISS-84W-SF	120 lm/W	11520	3000K-5000K		100-277 MV*	IP65	0-10 Volt Dimmable	DLC, ETL	96" x 10.974" x 8.21"	N
Designer Inspired 4 Foot Linear Pendant Fixture 	ECO-CS-4SL-8050-36W	150 lm/W	5400	3000-5000K	110°	100-277 MV	IP64	NON DIMMABLE	UL, DLC	50.16" x 5.12" x 4.17"	Y
	ECO-CS-4SL-8050-45W	150 lm/W	6750	3000-5000K	110°	100-277 MV	IP64	NON DIMMABLE	UL, DLC	60.79" x 4.72" x 3.94"	Y
	ECO-CS-4SL-11070-50W	150 lm/W	7500	3000-5000K	110°	100-277 MV	IP64	NON DIMMABLE	UL, DLC	60.79" x 4.72" x 3.94"	Y





LINEAR SURFACE & PENDANT FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Designer Inspired 8 Foot Linear Pendant Fixture 	ECO-CS-8SL-8050-60W	150 lm/W	9000	3000-5000K	110°	100-277 MV	IP64	NON DIMMABLE	UL, DLC	96.38" x 5.12" x 4.33"	Y
	ECO-CS-8SL-11070-75W	150 lm/W	11250	3000-5000K	110°	100-277 MV	IP64	NON DIMMABLE	UL, DLC	96.38" x 5.12" x 4.33"	Y
Easy Connect Suspended Linear Fixture 130 lm/w 	ECO-TYF-T201-40W	130 lm/W	5200	3000-5000K	120°	100-277 MV	IP54	0-10V DIMMING	UL, CUL, CE	47.17" x 2.36" x 2.95"	N
	ECO-TYF-T201-60W	130 lm/W	7800	3000-5000K	120°	100-277 MV	IP54	0-10V DIMMING	UL, CUL, CE	47.17" x 2.36" x 2.95"	N
4 Foot Linear Vapor Tight Fixture 	ECO-YZ-PTS-8132-24W	130 lm/W	3120	3000-5000K	120°	100-347 MV	IP65	NON DIMMABLE	UL, DLC	126.8" x 10" x 11.5"	Y
	ECO-YZ-PTS-8232-48W	130 lm/W	6240	3000-5000K	120°	100-347 MV	IP65	NON DIMMABLE	UL, DLC	126.8" x 10" x 11.5"	Y
	ECO-YZ-PTS-8332-72W	130 lm/W	9360	3000-5000K	120°	100-347 MV	IP65	NON DIMMABLE	UL, DLC	126" x 16.5" x 11.5"	Y
Retro Quick Lumilenz Strip Kits 	ECO-WIS-RBP-20W-4LL	130 lm/W	2600	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	48.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-30W-4LL	130 lm/W	3900	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	48.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-40W-4LL	130 lm/W	5200	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	48.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-40W-8LL	130 lm/W	5200	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	96.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-60W-8LL	130 lm/W	7800	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	96.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-80W-8LL	130 lm/W	10400	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	96.0" x 5.7" x 2.7"	N





LINEAR SURFACE & PENDANT FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Andromeda Linear Tri-Proof Garage Fixture 	ECO-FANDRO-20W-TP-2FT	140 lm/W	2800	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	23.62" x 2.80" x 3.31"	N
	ECO-FANDRO-30W-TP-3FT	140 lm/W	4200	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	35.43" x 2.80" x 3.31"	N
	ECO-FANDRO-40W-TP-4FT	140 lm/W	5600	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	47.24" x 2.80" x 3.31"	Y
	ECO-FANDRO-50W-TP-5FT	140 lm/W	7000	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	59.06" x 2.80" x 3.31"	N
	ECO-FANDRO-65W-TP-5FT	140 lm/W	9100	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	59.06" x 2.80" x 3.31"	N
	ECO-FANDRO-80W-TP-8FT	140 lm/W	11200	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	59.06" x 2.80" x 3.31"	N
Neutron Low Glare Linear Pendant Fixture 	ECO-TYF-LG-100W-LF	130 lm/W	13000	3000-6000K	80°	100-277 MV*	IP65	1-10V dimmable, DALI	DLC, ETL, CE	23.82" x 5.31" x 2.83"	N
	ECO-TYF-LG-150W-LF	130 lm/W	19500	3000-6000K	80°	100-277 MV*	IP65	1-10V dimmable, DALI	DLC, ETL, CE	35.63" x 5.31" x 2.83"	N
	ECO-TYF-LG-200W-LF	130 lm/W	26000	3000-6000K	80°	100-277 MV*	IP65	1-10V dimmable, DALI	DLC, ETL, CE	47.44" x 5.31" x 2.83"	N
Over The Bed Linear Halo Fixture 	ECO-OG-HALO-10	120 lm/W	1200	3000K-6500K	120°	AC100-277V	IP40	0-10V Dimming	DLC, ETL, CE	23.78" x 5.16" x 3.31"	N
	ECO-OG-HALO-15	120 lm/W	1800	3000K-6500K	120°	AC100-277V	IP40	0-10V Dimming	DLC, ETL, CE	36.61" x 5.16" x 3.31"	N
	ECO-OG-HALO-20	120 lm/W	2400	3000K-6500K	120°	AC100-277V	IP40	0-10V Dimming	DLC, ETL, CE	47.80" x 5.16" x 3.31"	N


PARKING GARAGE FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Spectre Park Garage Fixture 	ECO-RZ-SPECP-30W-PGF	125 lm/W	3750	3000-5000K	120°	100-277 MV	IP65		CUL, DLC	10.7" x 10.7" x 4.5"	N
	ECO-RZ-SPECP-45W-PGF	125 lm/W	5625	3000-5000K	120°	100-277 MV	IP65		CUL, DLC	10.7" x 10.7" x 4.5"	N
	ECO-RZ-SPECP-60W-PGF	125 lm/W	7500	3000-5000K	120°	100-277 MV	IP65		CUL, DLC	10.7" x 10.7" x 4.5"	N
	ECO-RZ-SPECP-70W-PGF	125 lm/W	8750	3000-5000K	120°	100-277 MV	IP65		CUL, DLC	10.7" x 10.7" x 4.5"	N
Constellation Surface Mounted Parking Garage Fixture 	ECO-MEZ-MCP06-27W-CF	131 lm/W	3537	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-45W-CF	122 lm/W	5490	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-48W-CF	125 lm/W	6000	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-60W-CF	127 lm/W	7620	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
	ECO-MEZ-MCP06-90W-CF	129 lm/W	11610	4000-5000K	150°	100-277 MV*	IP65	0-10V Dimmable, Motion sensor, & Optional EM Battery Backup	CUL, DLC	4.29" x 13.03"	Y
Spectre Down Light Fixture 	ECO-LXY-536A-70W	120 lm/W	8400	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.6" x 14.35" x 7.75"	Y
	ECO-LXY-536A-100W	120 lm/W	12000	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.6" x 14.35" x 7.75"	Y
	ECO-LXY-536A-120W	120 lm/W	14400	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.6" x 14.35" x 7.75"	Y
Spectre Up & Down Light Fixture 	ECO-LXY-538B-70W	130 lm/W	9100	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	13.75" x 6.78"	Y
	ECO-LXY-538B-100W	130 lm/W	13000	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	13.75" x 6.78"	Y
	ECO-LXY-538B-120W	130 lm/W	15600	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	13.75" x 6.78"	Y






PARKING GARAGE FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Apollo Surface Mounted Down Light Fixture 	ECO-LXY-137A-70W	120 lm/W	8400	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.20" x 14.20" x 5.78"	Y
	ECO-LXY-137A-100W	120 lm/W	12000	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.20" x 14.20" x 5.78"	Y
	ECO-LXY-137A-120W	120 lm/W	14400	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.20" x 14.20" x 5.78"	Y
	ECO-LXY-137B-150W	120 lm/W	18000	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.20" x 14.20" x 5.78"	Y
	ECO-LXY-137B-180W	120 lm/W	21600	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.20" x 14.20" x 5.78"	Y
	ECO-LXY-137B-240W	120 lm/W	28800	3000-5000K	90°,120°	90-277 MV	IP65	0-10V DIMMING	ETL	14.20" x 14.20" x 5.78"	Y
Bravo Surface Mounted Down Light 	ECO-BL-CNPY-50W-S	120 lm/W	6000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	8.86" x 8.86" x 3.94"	N
	ECO-BL-CNPY-75W-S	120 lm/W	9000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	8.86" x 8.86" x 3.94"	N
	ECO-BL-CNPY-100W-S	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	12.40" x 12.40" x 4.53"	N
	ECO-BL-CNPY-120W-S	120 lm/W	14400	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	12.40" x 12.40" x 4.53"	N
	ECO-BL-CNPY-50W-R	120 lm/W	6000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	11.42" x 4.53"	N
	ECO-BL-CNPY-75W-R	120 lm/W	9000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	11.42" x 4.53"	N
	ECO-BL-CNPY-100W-R	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.16" x 4.57"	N
	ECO-BL-CNPY-120W-R	120 lm/W	14400	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, DLC	15.16" x 4.57"	N
Ultra-Thin Series Canopy Fixture 	ECO-ULTRA-MES-45W	90 lm/W	4050	3000-5000K	60°,90°,120°	120-277 MV	IP65	0-10V DIMMING	UL, DLC	10.65" x 10.65" x 2.30	Y
	ECO-ULTRA-MES-65W	102 lm/W	6630	3000-5000K	60°,90°,120°	120-277 MV	IP65	0-10V DIMMING	UL, DLC	10.65" x 10.65" x 2.30	Y
	ECO-ULTRA-MES-70W	84 lm/W	5880	3000-5000K	60°,90°,120°	120-277 MV	IP65	0-10V DIMMING	UL, DLC	10.65" x 10.65" x 2.30	Y
Saturn Eclipse Garage Fixture 	ECO-SAT-100W-S6	135 lm/W	13500	3000-5700K	60°,90°,120°	100-277 MV*	IP65	NON DIMMABLE	UL, DLC, CE	14.17" x 6.89"	N
	ECO-SAT-150W-S6	135 lm/W	20250	3000-5700K	60°,90°,120°	100-277 MV*	IP65	NON DIMMABLE	UL, DLC, CE	14.17" x 6.89"	N
	ECO-SAT-200W-S6	135 lm/W	27000	3000-5700K	60°,90°,120°	100-277 MV*	IP65	NON DIMMABLE	UL, DLC, CE	16.93" x 8.07"	N






PARKING GARAGE FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
<p>Andromeda Linear Tri-Proof Garage Fixture</p> 	ECO-FANDRO-20W-TP-2FT	140 lm/W	2800	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	23.62" x 2.80" x 3.31"	N
	ECO-FANDRO-30W-TP-3FT	140 lm/W	4200	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	35.43" x 2.80" x 3.31"	N
	ECO-FANDRO-40W-TP-4FT	140 lm/W	5600	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	47.24" x 2.80" x 3.31"	Y
	ECO-FANDRO-50W-TP-5FT	140 lm/W	7000	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	59.06" x 2.80" x 3.31"	N
	ECO-FANDRO-65W-TP-5FT	140 lm/W	9100	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	59.06" x 2.80" x 3.31"	N
	ECO-FANDRO-80W-TP-8FT	140 lm/W	11200	3000-6500K	120°	100-277 MV	IP65	0-10 Dimmable, Motion Sensor, EM Battery	UL, CUL, DLC, CE	59.06" x 2.80" x 3.31"	N




POST TOP FIXTURES & POLES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Traditions Post Top Fixture 	ECO-YZPT-853-30W	85 lm/W	2550	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	18" x 35"	Y
	ECO-YZPT-853-45W	85 lm/W	3825	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	18" x 35"	Y
	ECO-YZPT-853-60W	85 lm/W	5100	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	18" x 35"	Y
	ECO-YZPT-859-25W	85 lm/W	2125	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	10.35" x 10.35" x 17.90"	Y
	ECO-YZPT-859-35W	85 lm/W	2975	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	10.35" x 10.35" x 17.90"	Y
	ECO-YZPT-850A-25W	85 lm/W	2125	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	22.75" x 19.85"	Y
	ECO-YZPT-850A-35W	85 lm/W	2975	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	22.75" x 19.85"	Y
Contemporary Post Top Fixture 	ECO-YZPT-851A-30W	85 lm/W	2550	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	21.50" x 22.35"	Y
	ECO-YZPT-851A-45W	85 lm/W	3825	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	21.50" x 22.35"	Y
	ECO-YZPT-851A-60W	85 lm/W	5100	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	21.50" x 22.35"	Y
	ECO-YZPT-856A-30W	85 lm/W	2550	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	22" x 26.30"	Y
	ECO-YZPT-856A-45W	85 lm/W	3825	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	22" x 26.30"	Y
	ECO-YZPT-856A-60W	85 lm/W	5100	3000-5000K	120°	90-277 MV	IP65	NON DIMMABLE	CUL, ETL	22" x 26.30"	Y
Urban SoftScape™ Saturn Post Top 	ECO-EW-SAT-24.5W-PT	133 lm/W	3192	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	23.21" x 15.76" DIA	N
	ECO-EW-SAT-35W-PT	133 lm/W	4655	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	23.21" x 15.76" DIA	N
	ECO-EW-SAT-58W-PT	133 lm/W	7714	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	23.21" x 15.76" DIA	N
Urban SoftScape™ Jupiter Post Top 	ECO-EW-JUP-24W-PT	111 lm/W	2664	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	23.21" x 15.76" DIA	N
	ECO-EW-JUP-35W-PT	107 lm/W	3745	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	23.21" x 15.76" DIA	N
	ECO-EW-JUP-58W-PT	102 lm/W	5916	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	23.21" x 15.76" DIA	N
Urban SoftScape™ Venus Post Top 	ECO-EW-VEN-24W-PT	111 lm/W	2664	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	21.65" x 15.76" DIA	N
	ECO-EW-VEN-35W-PT	107 lm/W	3745	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	21.65" x 15.76" DIA	N
	ECO-EW-VEN-58W-PT	102 lm/W	5916	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	21.65" x 15.76" DIA	N

POST TOP FIXTURES & POLES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Urban SoftScape™ Mercury Post Top 	ECO-EW-MER-24W-PT	133 lm/W	3192	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	21.65" x 15.76" DIA	N
	ECO-EW-MER-35W-PT	125 lm/W	4375	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	21.65" x 15.76" DIA	N
	ECO-EW-MER-58W-PT	128 lm/W	7424	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	21.65" x 15.76" DIA	N
Urban SoftScape™ Neptune Post Top 	ECO-EW-NEP-24W-PT	133 lm/W	3192	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	19.78" x 15.76" DIA	N
	ECO-EW-NEP-35W-PT	125 lm/W	4375	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	19.78" x 15.76" DIA	N
	ECO-EW-NEP-58W-PT	133 lm/W	7714	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	19.78" x 15.76" DIA	N
Urban SoftScape™ Stellar Luna Post Top 	ECO-EW-STL1-24W-PT	130 lm/W	3120	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	20.31" x 9.61"	N
	ECO-EW-STL1-35W-PT	125 lm/W	4375	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	20.31" x 9.61"	N
	ECO-EW-STL1-58W-PT	128 lm/W	7424	3000-5000K	Type II, III, IV, V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	20.31" x 9.61"	N
Urban SoftScape™ Stellar Luna II Post Top 	ECO-EW-STL2-24W-PT	111 lm/W	2664	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	20.31" x 9.61"	N
	ECO-EW-STL2-35W-PT	107 lm/W	3745	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	20.31" x 9.61"	N
	ECO-EW-STL2-58W-PT	102 lm/W	5916	3000-5000K	Type V	100-277 MV	IP66	0-10 & 1-10 dimmable, DALI Control, Timer control, Zigbee control	DLC, ETL	20.31" x 9.61"	N
London Town Post Top Fixture 	ECO-CH-OLT-30W-PT	130 lm/W	3900	3000-5000K	120°	100-277 MV	IP65	ADJ. CCT 3000/4000K/5000K OPTIONAL PHOTOCELL	CUL, ETL	13.77" x 13.77" x 24.88"	Y
	ECO-CH-OLT-60W-PT	130 lm/W	7800	3000-5000K	120°	100-277 MV	IP65	ADJ. CCT 3000/4000K/5000K OPTIONAL PHOTOCELL	CUL, ETL	13.77" x 13.77" x 24.88"	Y
	ECO-CH-OLT-75W-PT	130 lm/W	9750	3000-5000K	120°	100-277 MV	IP65	ADJ. CCT 3000/4000K/5000K OPTIONAL PHOTOCELL	CUL, ETL	13.77" x 13.77" x 24.88"	N
	ECO-CH-OLT-90W-PT	130 lm/W	11700	3000-5000K	120°	100-277 MV	IP65	ADJ. CCT 3000/4000K/5000K OPTIONAL PHOTOCELL	CUL, ETL	13.77" x 13.77" x 24.88"	N
	ECO-CH-OLT-100W-PT	130 lm/W	13000	3000-5000K	120°	100-277 MV	IP65	ADJ. CCT 3000/4000K/5000K OPTIONAL PHOTOCELL	CUL, ETL	13.77" x 13.77" x 24.88"	N
	ECO-CH-OLT-120W-PT	130 lm/W	15600	3000-5000K	120°	100-277 MV	IP65	ADJ. CCT 3000/4000K/5000K OPTIONAL PHOTOCELL	CUL, ETL	13.77" x 13.77" x 24.88"	Y



POST TOP RETROFIT LAMPS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Post Top Pyramid Style Retrofit Lamps 	ECO-RBHYDP-30W8s	150 lm/W	4500	2200-2700K	360°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.48"	Y
	ECO-RBHYDP-40W8s	150 lm/W	6000	2200-2700K	360°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.48"	Y
	ECO-RBHYDP-50W8s	150 lm/W	7500	2200-2700K	360°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.48"	Y
	ECO-RBHYDP-60W8s	150 lm/W	9000	2200-2700K	360°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.48"	Y
	ECO-RBHYDP-80W10s	150 lm/W	12000	2200-2700K	360°	100-277 MV	IP65	NON DIMMABLE	UL, DLC	5.91" x 8.58"	N
Post Top Torch Style Retrofit Lamps 	ECO-RL-YLT-30W8S	120 lm/W	3600	2200-2700K	360°	100-295 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.20"	Y
	ECO-RL-YLT-40W8S	120 lm/W	4800	2200-2700K	360°	100-295 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.20"	Y
	ECO-RL-YLT-50W8S	120 lm/W	6000	2200-2700K	360°	100-295 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.20"	Y
	ECO-RL-YLT-60W8S	120 lm/W	7200	2200-2700K	360°	100-295 MV	IP65	NON DIMMABLE	UL, DLC	5.04" x 7.20"	N
	ECO-RL-YLT-80W10S	120 lm/W	9600	2200-2700K	360°	100-295 MV	IP65	NON DIMMABLE	UL, DLC	6.57" x 7.68"	N
Post Top Rugby Style Retrofit Lamp 	ECO-BB-DJH-R-30W	120 lm/W	3600	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CE	3.46" x 10.16"	N
	ECO-BB-DJH-R-40W	120 lm/W	4800	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CE	3.46" x 10.16"	N
	ECO-BB-DJH-R-50W	120 lm/W	6000	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CE	3.46" x 10.16"	N


RETROFIT KITS & LAMPS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Encore Shoe Box Retrofit Kit 	ECO-GIRK-30-SB	132 lm/W	3960	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	4.7" x 4.7"	N
	ECO-GIRK-45-SB	132 lm/W	5940	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	4.7" x 4.7"	Y
	ECO-GIRK-60-SB	132 lm/W	7920	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	4.7" x 4.7"	Y
	ECO-GIRK-75-SB	132 lm/W	9900	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	6.1" x 5.1"	Y
	ECO-GIRK-100-SB	132 lm/W	13200	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	6.1" x 5.1"	Y
	ECO-GIRK-120-SB	132 lm/W	15840	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	7.9" x 6.1"	Y
	ECO-GIRK-150-SB	132 lm/W	19800	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	7.9" x 6.1"	Y
	ECO-GIRK-200-SB	132 lm/W	26400	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	7.9" x 6.1"	Y
	ECO-GIRK-280-SB	132 lm/W	36960	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	10.6" x 10.0"	Y
	ECO-GIRK-320-SB	132 lm/W	42240	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	10.6" x 10.0"	Y
	ECO-GIRK-350-SB	132 lm/W	46200	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	DLC Premium, ETL	10.6" x 10.0"	N
Oval Retrofit Kits for Shoe Box Area Light Fixtures 	ECO-DEL-RKPUS-80W	120 lm/W	9600	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	10.50" x 6.5" x 3.35"	Y
	ECO-DEL-RKPUS-100W	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	10.50" x 6.5" x 3.35"	N
	ECO-DEL-RKPUS-120W	120 lm/W	14400	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	10.50" x 6.5" x 3.35"	Y
	ECO-DEL-RKPUS-150W	120 lm/W	18000	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	10.50" x 6.5" x 3.35"	Y
	ECO-DEL-RKPUS-200W	120 lm/W	24000	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	10.50" x 6.5" x 3.35"	N
	ECO-DEL-RKPUS-240W	120 lm/W	28800	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	10.50" x 6.5" x 3.35"	N
	ECO-DEL-RKPUS-300W	120 lm/W	36000	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	12.25" x 7.5" x 3.35"	Y
	ECO-DEL-RKPUS-400W	120 lm/W	48000	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	14" x 8.20" x 3.50"	N
ECO-DEL-RKPUS-480W	120 lm/W	57600	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC	14" x 8.20" x 3.50"	N	
Pizza Tray Retrofit Kits For High Bay Fixtures 	ECO-LR-YPD-80W	120 lm/W	9600	3000-5000K	120°	100-277 MV	IP62	NON DIMMABLE	UL, CUL, DLC	11.81" x 9.65"	N
	ECO-LR-YPD-100W	120 lm/W	12000	3000-5000K	120°	100-277 MV	IP62	NON DIMMABLE	UL, CUL, DLC	11.81" x 9.65"	N
	ECO-LR-YPD-120W	120 lm/W	14400	3000-5000K	120°	100-277 MV	IP62	NON DIMMABLE	UL, CUL, DLC	11.81" x 9.65"	N
	ECO-LR-YPD-150W	120 lm/W	18000	3000-5000K	120°	100-277 MV	IP62	NON DIMMABLE	UL, CUL, DLC	11.81" x 9.65"	N
	ECO-LR-YPD-300W	120 lm/W	36000	3000-5000K	120°	100-277 MV	IP62	NON DIMMABLE	UL, CUL, DLC	13.39" x 10.63"	N
Condor High Bay Retrofit Lamps 	ECO-HBRL-120W-EZ1	140 lm/W	16800	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	N
	ECO-HBRL-155W-EZ1	140 lm/W	21700	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	Y
	ECO-HBRL-200W-EZ1	140 lm/W	28000	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	Y
	ECO-HBRL-240W-EZ1	140 lm/W	33600	3000-5000K	120°	100-277 MV	IP20	NON DIMMABLE	UL, CUL, DLC	8.90" x 8.92"	Y




RETROFIT KITS & LAMPS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Eagle Eye 180 Degree Retrofit Lamps 	ECO-CNS-CLW-36W	145 lm/W	11600	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, Energy Star	4.92" x 10.63"	Y
	ECO-CNS-CLW-50W	145 lm/W	14500	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, Energy Star	4.92" x 11.42"	N
	ECO-CNS-CLW-75W	145 lm/W	17400	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, Energy Star	4.92" x 12.20"	Y
	ECO-CNS-CLW-95W	145 lm/W	21750	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, Energy Star	4.92" x 13.19"	Y
	ECO-CNS-CLW-115W	145 lm/W	16675	3000-5000K	360°	100-277 MV	IP64	NON DIMMABLE	UL, CUL, Energy Star	4.92" x 13.19"	Y
Down Light Rugby Style Retrofit Lamp 	ECO-BB-DJH-R-30W	120 lm/W	3600	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CE	3.46" x 10.16"	N
	ECO-BB-DJH-R-40W	120 lm/W	4800	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CE	3.46" x 10.16"	N
	ECO-BB-DJH-R-50W	120 lm/W	6000	3000-5000K	360°	100-277 MV	IP65	NON DIMMABLE	UL, CE	3.46" x 10.16"	N
Retro Quick Magnetic Strip Kits 	ECO-WIS-20W-2FT-MS	125 lm/W	2500	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-30W-2FT-MS	125 lm/W	3750	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-40W-2FT-MS	125 lm/W	5000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-24W-4FT-MS	125 lm/W	3000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-30W-4FT-MS	125 lm/W	3750	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-40W-4FT-MS	125 lm/W	5000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-45W-4FT-MS	125 lm/W	5625	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-60W-4FT-MS	125 lm/W	7500	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
Orbital Split Recessed J-Box Down Lights 	ECO-TKO-10W-4DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-15W-4DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-20W-4DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-40W-4DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-10W-6DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 7.62"	Y
	ECO-TKO-15W-6DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 7.62"	Y
	ECO-TKO-20W-6DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 7.62"	Y
	ECO-TKO-40W-6DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-10W-8DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 9.21"	Y
	ECO-TKO-15W-8DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 9.21"	Y
	ECO-TKO-20W-8DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 9.21"	Y
	ECO-TKO-40W-8DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-10W-10DL	80 lm/W	800	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-15W-10DL	85 lm/W	1275	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
	ECO-TKO-20W-10DL	88 lm/W	1760	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y
ECO-TKO-40W-10DL	85 lm/W	3400	3000-5000K		100-277 MV	IP66	0-10V dimming	CUL, Energy Star	5.43" x 5.51"	Y	

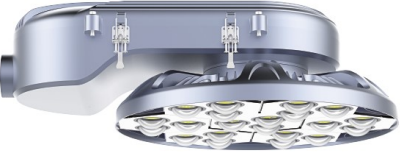



RETROFIT KITS & LAMPS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Retro Quick Lumilenz Strip Kits 	ECO-WIS-RBP-20W-4LL	130 lm/W	2600	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	48.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-30W-4LL	130 lm/W	3900	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	48.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-40W-4LL	130 lm/W	5200	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	48.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-40W-8LL	130 lm/W	5200	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	96.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-60W-8LL	130 lm/W	7800	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	96.0" x 5.7" x 2.7"	N
	ECO-WIS-RBP-80W-8LL	130 lm/W	10400	3500-5000K	120°	100-277 MV	IP20	0-10V Dimming	ETL	96.0" x 5.7" x 2.7"	N




SPORTS LIGHTING FIXTURES & HIGH MAST FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Polaris High Power Flood Fixture 150 lm/W 	ECO-RONO-HP-100W	150 lm/W	15000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 10.87" x 3.35"	N
	ECO-RONO-HP-150W	150 lm/W	22500	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 11.81" x 3.35"	N
	ECO-RONO-HP-200W	150 lm/W	30000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 14.84" x 3.35"	N
	ECO-RONO-HP-250W	150 lm/W	37500	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 18.9" x 3.35"	N
	ECO-RONO-HP-300W	150 lm/W	45000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	13.62" x 20.9" x 3.35"	N
	ECO-RONO-HP-400W	150 lm/W	60000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 15.98" x 3.35"	N
	ECO-RONO-HP-500W	150 lm/W	75000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 18.9" x 3.35"	N
	ECO-RONO-HP-600W	150 lm/W	90000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 22.05" x 3.35"	N
	ECO-RONO-HP-800W	150 lm/W	120000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 28.15" x 3.35"	N
	ECO-RONO-HP-1000W	150 lm/W	150000	3000-5700K	30°,60°,90°,60°x135°,85°x135°	100-277 MV*	IP65	0-10V DIMMING	ETL, CE, FCC	24.41" x 34.17" x 3.35"	N
North Star Arena & Stadium Flood Fixture 	ECO-LSNS-SL-100W	160 lm/W	16000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	12.13" x 9.45" x 2.95"	N
	ECO-LSNS-SL-150W	160 lm/W	24000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	12.13" x 12" x 2.95"	N
	ECO-LSNS-SL-200W	160 lm/W	32000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	16.06" x 12" x 2.95"	N
	ECO-LSNS-SL-240W	160 lm/W	38400	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	14.09" x 14.57" x 2.95"	N
	ECO-LSNS-SL-300W	160 lm/W	48000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	18.03" x 14.57" x 2.95"	N
	ECO-LSNS-SL-400W	160 lm/W	64000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	18.03" x 17.13" x 2.95"	N
	ECO-LSNS-SL-500W	160 lm/W	80000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	21.97" x 17.13" x 2.95"	N
	ECO-LSNS-SL-600W	160 lm/W	96000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	25.91" x 17.13" x 2.95"	N
	ECO-LSNS-SL-720W	160 lm/W	115200	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	25.91" x 19.69" x 2.95"	N
	ECO-LSNS-SL-840W	160 lm/W	134400	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	29.84" x 19.69" x 2.95"	N
	ECO-LSNS-SL-900W	160 lm/W	144000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	31.81" x 19.69" x 2.95"	N
	ECO-LSNS-SL-1000W	160 lm/W	160000	3000-5700K	75°,135°	100-277 MV*	IP66	1-10V DIMMING	DLC, ETL, CE	27.87" x 24.80" x 2.95"	N
Arcturus G6 Sports Light Fixture 	ECO-HDSL-300W-II	170 lm/W	51000	3000-6500K	30°,45°,60°	100-277 MV*	IP66	1-10V DIMMING	UL, DLC, CE, FCC	19.69" x 15.94" x 16.34"	N
	ECO-HDSL-400W-II	160 lm/W	64000	3000-6500K	30°,45°,60°	100-277 MV*	IP66	1-10V DIMMING	UL, DLC, CE, FCC	19.69" x 15.94" x 16.34"	N
	ECO-HDSL-500W-II	160 lm/W	80000	3000-6500K	30°,45°,60°	100-277 MV*	IP66	1-10V DIMMING	UL, DLC, CE, FCC	19.69" x 15.94" x 16.34"	N
	ECO-HDSL-600W-II	160 lm/W	96000	3000-6500K	30°,45°,60°	100-277 MV*	IP66	1-10V DIMMING	UL, DLC, CE, FCC	19.69" x 15.94" x 16.34"	N
	ECO-HDSL-750W-II	150 lm/W	112500	3000-6500K	15°,20°,25°,40°,60°,80°	100-277 MV*	IP66	1-10V DIMMING	UL, DLC, CE, FCC	25" x 20.47" x 20.28"	N
	ECO-HDSL-1250W-II	150 lm/W	187500	3000-6500K	15°,20°,25°,40°,60°,80°	100-277 MV*	IP66	1-10V DIMMING	UL, DLC, CE, FCC	25" x 20.47" x 20.28"	N



SPORTS LIGHTING FIXTURES & HIGH MAST FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Venus High Mast Roadway & Area Lighting 	ECO-HDVHM-210W	140 lm/W	29400	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
	ECO-HDVHM-240W	140 lm/W	33600	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
	ECO-HDVHM-320W	140 lm/W	44800	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
	ECO-HDVHM-475W	140 lm/W	66500	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
	ECO-HDVHM-570W	140 lm/W	79800	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
	ECO-HDVHM-831W	140 lm/W	88340	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
	ECO-HDVHM-750W	140 lm/W	105000	3000-5700K	15°,30°,45°,60°,90°	100-277 MV*	IP66	0-10V Dimming, P7 Photocontrol, ROAMTM enabled	UL, CUL, CE	29.24" x 43.31" x 9.28"	N
Super Nova G-IV Sports Light 	ECO-GISN-G-IV-240W-SL	153 lm/W	36720	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-320W-SL	153 lm/W	48960	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-410W-SL	147 lm/W	60270	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-480W-SL	142 lm/W	68160	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-535W-SL	137 lm/W	73295	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	14.96" x 14.88" x 7.36"	N
	ECO-GISN-G-IV-600W-SL	148 lm/W	88800	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	19.06" x 18.98" x 7.60"	N
	ECO-GISN-G-IV-735W-SL	142 lm/W	104370	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	19.06" x 18.98" x 7.60"	N
	ECO-GISN-G-IV-790W-SL	138 lm/W	109020	3000-6000K	16°,40°,60°,90°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	19.06" x 18.98" x 7.60"	N
	ECO-GISN-G-IV-937W-SL	148 lm/W	138676	3000-6000K	16°,40°,60°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
	ECO-GISN-G-IV-1080W-SL	144 lm/W	155520	3000-6000K	16°,40°,60°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
	ECO-GISN-G-IV-1200W-SL	142 lm/W	170400	3000-6000K	16°,40°,60°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
	ECO-GISN-G-IV-1420W-SL	141 lm/W	200220	3000-6000K	16°	100-277 MV*	IP65	Zigbee, 0-10V Dimming, Smart Phone Configurable	UL, CE	21.14" x 21.06" x 8.74"	N
Magic Square Industrial Flood 	ECO-TYF36-MS-120W	130 lm/W	15600	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	11.81" x 12.60" x 9.29"	N
	ECO-TYF36-MS-180W	130 lm/W	23400	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	15.35" x 12.60" x 9.29"	N
	ECO-TYF36-MS-240W	130 lm/W	31200	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
	ECO-TYF36-MS-300W	130 lm/W	39000	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
	ECO-TYF36-MS-500W	130 lm/W	65000	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
	ECO-TYF36-MS-1000W	130 lm/W	130000	3000-5700K	30°,60°,90°,30°x70°,60°x90°	100-277 MV*	IP67	0-10V DIMMING, MOTION	UL, CUL, DLC Premium	18.90" x 12.60" x 9.29"	N
Interstellar High Mast & Sports Fixture 	ECO-ST-LHM100W-HM	130 lm/W	13000	3000-5000K		100-277 MV*	IP65		CUL, DLC	16.06" x 10.24" x 5.98"	N
	ECO-ST-LHM150W-HM	130 lm/W	19500	3000-5000K		100-277 MV*	IP65		CUL, DLC	16.06" x 10.24" x 5.98"	N
	ECO-ST-LHM200W-HM	130 lm/W	26000	3000-5000K		100-277 MV*	IP65		CUL, DLC	16.06" x 10.24" x 5.98"	N
	ECO-ST-LHM300W-HM	130 lm/W	39000	3000-5000K		100-277 MV*	IP65		CUL, DLC	28.15" x 27.95" x 6.69"	N
	ECO-ST-LHM400W-HM	130 lm/W	52000	3000-5000K		100-277 MV*	IP65		CUL, DLC	28.15" x 27.95" x 6.69"	N
	ECO-ST-LHM600W-HM	130 lm/W	78000	3000-5000K		100-277 MV*	IP65		CUL, DLC	28.15" x 27.95" x 6.69"	N

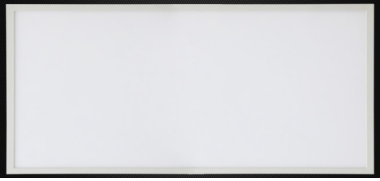



STREET LIGHTING

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Luma Series Street Light 	ECO-LUMA-SID20W-SL	135 lm/W	2700	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	21.49" x 9.05" x 3.31"	N
	ECO-LUMA-SIA30W-SL	135 lm/W	4050	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	21.49" x 9.05" x 3.31"	N
	ECO-LUMA-SIB40W-SL	135 lm/W	5400	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	21.49" x 9.05" x 3.31"	N
	ECO-LUMA-SIC60W-SL	135 lm/W	8100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	21.49" x 9.05" x 3.31"	N
	ECO-LUMA-SIB80W-SL	135 lm/W	10800	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	22.46" x 9.05" x 3.31"	N
	ECO-LUMA-SIC100W-SL	135 lm/W	13500	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	22.46" x 9.05" x 3.31"	N
Titan Series Street Light 	ECO-TITAN-SKA30W-SL	135 lm/W	4050	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	24.65" x 10.63" x 3.90"	N
	ECO-TITAN-SKA60W-SL	135 lm/W	8100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	24.65" x 10.63" x 3.90"	N
	ECO-TITAN-SKA90W-SL	135 lm/W	12150	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	24.65" x 10.63" x 3.90"	N
	ECO-TITAN-SKA120W-SL	135 lm/W	16200	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	35.47" x 10.63" x 3.90"	N
	ECO-TITAN-SKA180W-SL	135 lm/W	24300	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	1-10V DIMMING	UL, CUL, DLC, CE	35.47" x 10.63" x 3.90"	N
Alfa Series Street Light 	ECO-ALFA-SLA30W-SL	135 lm/W	4050	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	18.23" x 13.58" x 4.57"	N
	ECO-ALFA-SLA60W-SL	135 lm/W	8100	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	20.59" x 13.58" x 4.57"	N
	ECO-ALFA-SLA90W-SL	135 lm/W	12150	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	22.95" x 13.58" x 4.57"	N
	ECO-ALFA-SLA120W-SL	135 lm/W	16200	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	25.31" x 13.58" x 4.57"	N
	ECO-ALFA-SLA150W-SL	135 lm/W	20250	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	27.68" x 13.58" x 4.57"	N
	ECO-ALFA-SLA180W-SL	135 lm/W	24300	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	30.04" x 13.58" x 4.57"	N
	ECO-ALFA-SLA210W-SL	135 lm/W	28350	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	32.40" x 13.58" x 4.57"	N
	ECO-ALFA-SLA240W-SL	135 lm/W	32400	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	34.76" x 13.58" x 4.57"	N
	ECO-ALFA-SLA270W-SL	135 lm/W	36450	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	37.13" x 13.58" x 4.57"	N
	ECO-ALFA-SLA300W-SL	135 lm/W	40500	3000-5700K	Type I, II, III, IV, V	100-277 MV*	IP67	0-10V DIMMING, DALI CAPABLE	UL, CUL, DLC, CE	39.49" x 13.58" x 4.57"	N




STREET LIGHTING

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Constellation Street Light 	ECO-LRM-01-45W-SL	141 lm/W	6345	3000-5000K	Type II, Type III, Type IV	120-277 MV	IP66	0-10 DIMMING ZIGBY	CUL, DLC	23.84" x 10.43" x 4.52"	Y
	ECO-LRM-01-70W-SL	134 lm/W	9380	3000-5000K	Type II, Type III, Type IV	120-277 MV	IP66	0-10 DIMMING ZIGBY	CUL, DLC	23.84" x 10.43" x 4.52"	Y
	ECO-LRM-01-100W-SL	138 lm/W	13800	3000-5000K	Type II, Type III, Type IV	120-277 MV	IP66	0-10 DIMMING ZIGBY	CUL, DLC	23.84" x 10.43" x 4.52"	Y
	ECO-LRM-01-150W-SL	133 lm/W	19950	3000-5000K	Type II, Type III, Type IV	120-277 MV	IP66	0-10 DIMMING ZIGBY	CUL, DLC	23.84" x 10.43" x 4.52"	Y
Neutron Star Street Light 	ECO-HDNS-40W-SL	130 lm/W	5200	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	17.95" x 8.98" x 3.94"	N
	ECO-HDNS-50W-SL	130 lm/W	6500	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	17.95" x 8.98" x 3.94"	N
	ECO-HDNS-60W-SL	130 lm/W	7800	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	17.95" x 8.98" x 3.94"	N
	ECO-HDNS-75W-SL	130 lm/W	9750	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	17.95" x 8.98" x 3.94"	N
	ECO-HDNS-90W-SL	130 lm/W	11700	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	23.62" x 11.22" x 4.92"	N
	ECO-HDNS-100W-SL	130 lm/W	13000	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	23.62" x 11.22" x 4.92"	N
	ECO-HDNS-120W-SL	130 lm/W	15600	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	23.62" x 11.22" x 4.92"	N
	ECO-HDNS-150W-SL	130 lm/W	19500	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	23.62" x 11.22" x 4.92"	N
	ECO-HDNS-180W-SL	130 lm/W	23400	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	23.62" x 11.22" x 4.92"	N
ECO-HDNS-200W-SL	130 lm/W	26000	3000-6500K	T2 T3 T4 T5	100-277 MV	IP66	Photocell Sensor	CUL, ETL, CE, FCC	23.62" x 11.22" x 4.92"	N	






TROFFER FIXTURES & FLAT PANELS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Chameleon Wattage & Color Changing Flat Panel 	ECO-CH-JPN-30W-2X2	130 lm/W	3900	3000K, 4000K, 5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC	23.70" x 23.70" x 0.39"	Y
	ECO-CH-JPN-35W-2X2	130 lm/W	4550	3000K, 4000K, 5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC	23.70" x 23.70" x 0.39"	Y
	ECO-CH-JPN-40W-2X2	130 lm/W	5200	3000K, 4000K, 5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC	23.70" x 23.70" x 0.39"	Y
	ECO-CH-JPN-30W-2X4	130 lm/W	3900	3000K, 4000K, 5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC	23.70" x 47.60" x 0.39"	Y
	ECO-CH-JPN-35W-2X4	130 lm/W	4550	3000K, 4000K, 5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC	23.70" x 47.60" x 0.39"	Y
	ECO-CH-JPN-40W-2X4	130 lm/W	5200	3000K, 4000K, 5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC	23.70" x 47.60" x 0.39"	Y
Premium Flat Panel 125 lm/w 	ECO-YZ-P1-40W-1x4	125 lm/W	5000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	11.75" x 47.75" x .35"	Y
	ECO-YZ-P4-30W-2x2	125 lm/W	3750	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 23.75" x .35"	Y
	ECO-YZ-P4-40W-2x2	125 lm/W	5000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 23.75" x .35"	Y
	ECO-YZ-P7-40W-2x4	125 lm/W	5000	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.75" x .35"	Y
	ECO-YZ-P7-50W-2x4	125 lm/W	6250	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.75" x .35"	Y
	ECO-YZ-P7-75W-2x4	125 lm/W	9375	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.75" x .35"	Y
Platinum Seamless Flat Panel 125 lm/w 	ECO-LGM-FP-3012-40W-1x4	125 lm/W	5000	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	11.73" x 47.60" x 0.39"	N
	ECO-LGM-FP-6060-25W-2x2	125 lm/W	3125	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 23.70" x 0.39"	N
	ECO-LGM-FP-6060-30W-2x2	125 lm/W	3750	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 23.70" x 0.39"	N
	ECO-LGM-FP-6060-40W-2x2	125 lm/W	5000	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 23.70" x 0.39"	N
	ECO-LGM-FP-6012-30W-2x4	125 lm/W	3750	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 47.60" x 0.39"	N
	ECO-LGM-FP-6012-40W-2x4	125 lm/W	5000	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 47.60" x 0.39"	N
	ECO-LGM-FP-6012-50W-2x4	125 lm/W	6250	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 47.60" x 0.39"	N
Platinum Remote Color Changing Flat Panel 	ECO-LGM-CCFP-6060-40W-2x2	100 lm/W	4000	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 23.70" x 0.39"	N
	ECO-LGM-CCFP-6012-50W-2x4	100 lm/W	5000	3000-5000K	120°	100-277 MV	IP40	0-10V DIMMING	UL, CUL, DLC Premium	23.70" x 47.60" x 0.39"	N





TROFFER FIXTURES & FLAT PANELS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Classic Volumetric Troffer Fixture 135 lm/w 	ECO-YZ-T4-25W-2x2	135 lm/W	3375	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 23.75"	Y
	ECO-YZ-T4-36W-2x2	135 lm/W	4860	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 23.75"	Y
	ECO-YZ-T7-25W-2x4	135 lm/W	3375	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.71" x 3.28"	Y
	ECO-YZ-T7-36W-2x4	135 lm/W	4860	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.71" x 3.28"	Y
	ECO-YZ-T7-50W-2x4	135 lm/W	6750	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.71" x 3.28"	Y
Retro Quick Magnetic Strip Kits 	ECO-WIS-20W-2FT-MS	125 lm/W	2500	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-30W-2FT-MS	125 lm/W	3750	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-40W-2FT-MS	125 lm/W	5000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-24W-4FT-MS	125 lm/W	3000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-30W-4FT-MS	125 lm/W	3750	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-40W-4FT-MS	125 lm/W	5000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-45W-4FT-MS	125 lm/W	5625	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-60W-4FT-MS	125 lm/W	7500	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
Classic Volumetric Troffer Retrofit Kit 135 lm/w 	ECO-YZ-R4-25W-2x2	135 lm/W	3375	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 23.75"	Y
	ECO-YZ-R4-36W-2x2	135 lm/W	4860	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 23.75"	Y
	ECO-YZ-R7-25W-2x4	135 lm/W	3375	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.71" x 3.28"	Y
	ECO-YZ-R7-36W-2x4	135 lm/W	4860	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.71" x 3.28"	Y
	ECO-YZ-R7-50W-2x4	135 lm/W	6750	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium	23.75" x 47.71" x 3.28"	Y


TUBES & RETROFIT STRIP KITS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Premium 4 Foot T8 Ballast Compatible & Rewire Tube 	ECO-YZ-T8-12WBX	140 lm/W	1680	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T8-15WBX	140 lm/W	2100	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T8-18WBX	140 lm/W	2520	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T8-20WBX	140 lm/W	2800	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T8-22WBX	140 lm/W	3080	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T8-30WBX	140 lm/W	4200	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
Platinum 4 Foot T8 Rewire Only Tube High Output 	ECO-LFT8-12W-01	150 lm/W	1800	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-LFT8-15W-01	150 lm/W	2250	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-LFT8-18W-01	150 lm/W	2700	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-LFT8-20W-01	150 lm/W	3000	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, CUL, DLC Premium		Y
SUPER Classic High Output 150lm/W 4 Foot T8 Rewire Only 	ECO-SLT8-10.5W-8XX-BB	157 lm/W	1648.5	3000-5000K	120°	120-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC		Y
	ECO-SLT8-12.5W-8XX-BB	150 lm/W	1800	3000-5000K	120°	120-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC		Y
	ECO-SLT8-15W-8XX-BB	147 lm/W	2205	3000-5000K	120°	120-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC		Y
Elite 4 Ft T8 Rewire Only Tubes Super High Output 	ECO-LFT8-10.6W-SHO	182 lm/W	1929.2	3000-5000K	120°	100-277 MV	IP20	0-10V DIMMING	UL, CUL, DLC Premium		Y
2 & 3 Foot T8 Straight & UBend Tubes 130 lm/w 	ECO-YZ-T8-15W900-BINS-3-FT	130 lm/W	1950	3000-5000K	120°	100-382 MV	IP44	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T8-15W600-UBend-2-FT	130 lm/W	1950	3000-5000K	120°	100-382 MV	IP44	0-10V DIMMING	UL, CUL, DLC Premium		Y





TUBES & RETROFIT STRIP KITS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Premium 2-4 Ft T5 Ballast Compatible/Rewire Tubes 	ECO-YZ-T5-12W600-BONT-2-FT	130 lm/W	1560	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T5-15W1200-BONT-4-FT	130 lm/W	1950	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T5-22W1200-BONT-4-FT	130 lm/W	2860	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T5-25W1200-BONT-4-FT	130 lm/W	3250	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
	ECO-YZ-T5-30W1200-BONT-4-FT	130 lm/W	3900	3000-5000K	120°	100-277 MV	IP65	0-10V DIMMING	UL, CUL, DLC Premium		Y
Retro Quick Magnetic Strip Kits 	ECO-WIS-20W-2FT-MS	125 lm/W	2500	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-30W-2FT-MS	125 lm/W	3750	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-40W-2FT-MS	125 lm/W	5000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	22" x .55" x .64"	N
	ECO-WIS-24W-4FT-MS	125 lm/W	3000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-30W-4FT-MS	125 lm/W	3750	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-40W-4FT-MS	125 lm/W	5000	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-45W-4FT-MS	125 lm/W	5625	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
	ECO-WIS-60W-4FT-MS	125 lm/W	7500	3000-5000K	180°	100-277 MV	IP44	0-10 DIMMING	CUL, DLC	46" x .55" x .64"	N
8 Foot T8 Rewire Only Tube 130 lm/w 	ECO-YZ-T8-31W-2400-BINT	130 lm/W	4030	3000-5000K	120°	100-382 MV	IP44	NON DIMMABLE	UL, CUL, DLC Premium		N
	ECO-YZ-T8-40W-2400-BINT	146 lm/W	5840	3000-5000K	120°	100-382 MV	IP44	NON DIMMABLE	UL, CUL, DLC Premium		Y
3 Foot – 6 Foot Refrigerator Tubes 	ECO-YZR-12W-900-3-FT	140 lm/W	1680	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium		N
	ECO-YZR-15W-1200-4-FT	140 lm/W	2100	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium		Y
	ECO-YZR-18W-1200-4-FT	140 lm/W	2520	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium		Y
	ECO-YZR-22W-1500-5-FT	140 lm/W	3080	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium		Y
	ECO-YZR-30W-1800-6-FT	140 lm/W	4200	3000-5000K	120°	100-277 MV	IP65	NON DIMMABLE	UL, CUL, DLC Premium		Y





WALKWAY & PLAZA BOLLARDS

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Stonehenge Collection 	ECO-LTZY811A-25W	92 lm/W	2300	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY811B-25W	92 lm/W	2300	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY811B-35W	92 lm/W	3220	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY811C-25W	92 lm/W	2300	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY811D-25W	92 lm/W	2300	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY811D-35W	92 lm/W	3220	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812A-25W	94 lm/W	2350	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812A-35W	94 lm/W	3290	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812B-25W	94 lm/W	2350	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812B-35W	94 lm/W	3290	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812B-50W	94 lm/W	4700	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812B-60W	94 lm/W	5640	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812C-25W	94 lm/W	2350	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812C-35W	94 lm/W	3290	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812D-25W	94 lm/W	2350	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812D-35W	94 lm/W	3290	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812D-50W	94 lm/W	4700	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
	ECO-LTZY812D-60W	94 lm/W	5640	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y
ECO-LTZY813-25W	60 lm/W	1500	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y	
ECO-LTZY813-35W	60 lm/W	2100	3000-5000K	150°	90-277 MV	IP65	NON DIMMABLE	UL, Energy Star	6" x 40"	Y	

WALLPACKS & BULKHEAD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Night Owl I Non-Cutoff Fixture 	ECO-DEL-LSWP-41W	115 lm/W	4715	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	15.55" x 11.61" x 9.65"	Y
	ECO-DEL-LSWP-60W	115 lm/W	6900	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	15.55" x 11.61" x 9.65"	Y
	ECO-DEL-LSWP-80W	115 lm/W	9200	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	15.55" x 11.61" x 9.65"	Y
	ECO-DEL-LSWP-100W	115 lm/W	11500	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	15.55" x 11.61" x 9.65"	Y
	ECO-DEL-LSWP-120W	115 lm/W	13800	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	17.55" x 13.61" x 11.65"	Y
	ECO-DEL-LSWP-150W	115 lm/W	17250	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	17.55" x 13.61" x 11.65"	Y
Night Owl II Full Cutoff Fixture 	ECO-SEM-AWPF-45W	106 lm/W	4770	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	16" x 11" x 8"	Y
	ECO-SEM-AWPF-70W	106 lm/W	7420	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	16" x 11" x 8"	Y
	ECO-SEM-AWPF-90W	106 lm/W	9540	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	16" x 11" x 8"	Y
	ECO-SEM-AWPF-135W	106 lm/W	14310	3000-5000K	120°	100-277 MV*	IP65	NON DIMMABLE	CUL, DLC, ETL	16" x 11" x 8"	Y
Half Moon II Full Cut Off Wall Pack 	ECO-CH-WWP-45W-HMII	118 lm/W	5310	3000-6500K	45°/90°	100-277 MV*	IP65	Photocell Control Available	CUL, CE, FCC	14.16" x 7.38" x 7.38"	Y
	ECO-CH-WWP-70W-HMII	119 lm/W	8330	3000-6500K	45°/90°	100-277 MV*	IP65	Photocell Control Available	CUL, CE, FCC	14.16" x 7.38" x 7.38"	Y
Rotatable Wall Pack 	ECO-CH-LWP-45W-RWP	125 lm/W	5625	5000K	60°	100-277 MV*	IP65		CUL, CE, FCC	9.13" x 5.2" x 5.67"	Y
	ECO-CH-LWP-80W-RWP	125 lm/W	10000	5000K	60°	100-277 MV*	IP65		CUL, CE, FCC	9.0" x 5.0" x 8.9"	Y

WALLPACKS & BULKHEAD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Night Hawk Mini Fixture 	ECO-SEM-WM-15W	107 lm/W	1605	3000-5000K	120°	120-277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	11" x 6" x 8"	Y
	ECO-SEM-WM-17W	107 lm/W	1819	3000-5000K	120°	120-277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	11" x 6" x 8"	Y
	ECO-SEM-WM-25W	107 lm/W	2675	3000-5000K	120°	120-277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	11" x 6" x 8"	Y
Eagle Eye Slim Cutoff Fixture 	ECO-SEM-SWP-30W	100 lm/W	3000	3000-5000K	20°	277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	9.68" x 3.25" x 8"	Y
	ECO-SEM-SWP-40W	112 lm/W	4480	3000-5000K	20°	277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	9.68" x 3.25" x 8"	Y
	ECO-SEM-SWP-70W	112 lm/W	7840	3000-5000K	20°	277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	9.68" x 3.25" x 8"	Y
	ECO-SEM-SWP-90W	112 lm/W	10080	3000-5000K	20°	277 MV	IP65	NON DIMMABLE	CUL, DLC, ETL	9.68" x 3.25" x 8"	Y
Column Sconce Up & Down Fixture 	ECO-LXY313C-B-1-30W-one-side-only	110 lm/W	3300	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 11.25"	Y
	ECO-LXY313C-B-1-45W-one-side-only	110 lm/W	4400	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 11.25"	Y
	ECO-LXY313C-B-1-60W-one-side-only	110 lm/W	6600	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 11.25"	Y
	ECO-LXY313C-B-1-75W-one-side-only	110 lm/W	8250	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 11.25"	Y
	ECO-LXY-313C-B-2-70W-both-sides	110 lm/W	7700	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 14.15"	Y
	ECO-LXY-313-B-2-100W-both-sides	110 lm/W	11000	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 14.15"	Y
	ECO-LXY-313-B-2-120W-both-sides	110 lm/W	13200	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 14.15"	Y
	ECO-LXY-313-B-2-150W-both-sides	110 lm/W	16500	3000-5000K	10°, 15°, 30°, 60°	90-277 MV	IP65	NON DIMMABLE	ETL, CE, FCC	10.5" x 8.70" x 14.15"	Y
Nautic Star Bulkhead & Canopy Fixture 	ECO-NSTAR-18W-PC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-18W-HC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-18W-CC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-18W-GC	89 lm/W	1602	3000-5000K	120°	100-277 MV	IP65		ETL, CE	10.83" x 3.07"	N
	ECO-NSTAR-28W-PC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
	ECO-NSTAR-28W-HC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
	ECO-NSTAR-28W-CC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N
	ECO-NSTAR-28W-GC	90 lm/W	2520	3000-5000K	120°	100-277 MV	IP65		ETL, CE	13.78" x 5.59"	N

WALLPACKS & BULKHEAD FIXTURES

	PART NUMBER	EFFICIENCY	FLUX	COLOR	BEAM ANGLE	INPUT VOLT	IP	CONTROLS	CERTS	DIMENSIONS	US STOCK
Genesis Up & Down Column Sconce 	ECO-PRGEN-5W-RCS	100 lm/W	500	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	3.54" x 10.24"	N
	ECO-PRGEN-10W-RCS	100 lm/W	1000	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	3.54" x 10.24"	N
	ECO-PRGEN-15W-RCS	100 lm/W	1500	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	4.33" x 11.81"	N
	ECO-PRGEN-20W-RCS	100 lm/W	2000	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	4.33" x 11.81"	N
	ECO-PRGEN-25W-RCS	100 lm/W	2500	3000-6500K	45°	100-277 MV	IP65	NA	ETL, CE	5.71" x 11.81"	N
Gemini High Power Up & Down Column Sconce 	ECO-PRHP-GEM-10W	100 lm/W	1000	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	2.56" x 3.95" x 9.06"	N
	ECO-PRHP-GEM-12W	100 lm/W	1200	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	2.56" x 3.95" x 9.06"	N
	ECO-PRHP-GEM-18W	100 lm/W	1800	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	4.33" x 11.81"	N
	ECO-PRHP-GEM-24W	100 lm/W	2400	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	4.33" x 11.81"	N
	ECO-PRHP-GEM-36W	100 lm/W	3600	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	5.71" x 11.81"	N
	ECO-PRHP-GEM-48W	100 lm/W	4800	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	6.30" x 11.81"	N
	ECO-PRHP-GEM-72W	100 lm/W	7200	3000-6500K	15°, 25°, 45°, 60°, 90°, 120°	100-277 MV*	IP65	DMX512, Remote Control	ETL, CE	7.09" x 11.81"	N

OPTIONAL ACCESSORIES:

*ADD \$75 FOR HIGH VOLTAGE DRIVER OPTION.

*ADD \$120 FOR EMERGENCY BATTERY BACKUP OPTION.

*ADD \$24 FOR A PHOTO SENSOR.

*ADD \$32 FOR AN OCCUPANCY OR PIR SENSOR NODE.

*ADD \$140 FOR A SINGLE GATEWAY.

*ADD \$38 FOR REMOTE CONTROLLER.

*WE NOW STOCK STEEL POLES, BULLHORNS, AND TENON BRACKETS. PLEASE CONTACT US FOR PRICING AND AVAILABILITY.

*NOTE: EcoLite RESERVES THE RIGHT TO CHANGE PRICING AND MOQ WITHOUT FORMAL NOTICE. PRICE QUOTES ARE GOOD FOR 30 DAYS.

*PLEASE ALSO NOTE THAT THE FREIGHT ALLOWED IS \$2,500.00 FOR DOMESTIC ORDERS. FACTORY FREIGHT COSTS TBD AT THE TIME OF ORDER.

*PLEASE VERIFY U.S. PRODUCT PRICING AND AVAILABILITY WITH AN ECOLITE REPRESENTATIVE BEFORE QUOTING THE CLIENT.

*TO SEE THE ECOLITE LED U.S. MANUFACTURED ARCHITECTURAL SPECIFIER CATALOG, GO TO: ECOLITELED.COM

