

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

HIGH OCTANE SURFACE MOUNT CANOPY FIXTURE




The **High Octane Surface Mount Fixture** is a DLC Premium canopy fixture that delivers high lumen output with high efficiency. Ideal for high gas station canopies, this fixture delivers high performance, and eliminates maintenance for 100,000+ hours. Easy 1-10V control for dimming and DLC Premium qualifies for the maximum rebates, in many regions.

FEATURES

- cULus and DLC Premium certifications
- 140 lm/W
- IP65
- 120-277VAC
- Surge protection
- 1-10V dimming
- Easy to install and operate
- Instant start, no flicker, silent operation

APPLICATIONS

- Gas stations
- Service station
- Underground parking lot
- Warehouse
- Garage
- Factory floor



HIGH OCTANE SURFACE MOUNT CANOPY FIXTURE

ORDERING INFORMATION

PART NUMBER	WATTS	VOLTAGE	LUMENS	CRI	CCT	MIN ORDER QTY	US STOCK
ECO-CNS-HO-180W-CL	180W	120-277 VAC	25,400	80+	4000K/4500K/5000K/5700K	2	No

TECHNICAL SPECIFICATIONS

Optical Distributions	110°
CRI	80+
Efficacy	140 Lm/W
IP Rating	IP65
Input Voltage	110-277 VAC
Current	1.5A (@120V)
Power Frequency	50-60 Hz
Power Factor	>0.90
Flicker Percent	<5%
Certifications	cULus, DLC Premium, FCC
Housing Material	Die-cast Aluminum
Rated Life (L70)	>50,000 Hours
Warranty	10 Years, 50,000 Hours Non-Prorated
Operating Temperature	-40° - 113°F
Luminaire Net Weight	17.3 lbs
Controls	1-10V dimming

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.


CONTROLS

Control Options: 1-10V dimming.


HIGH OCTANE SURFACE MOUNT CANOPY FIXTURE

PHOTOMETRICS

Luminous Intensity Distribution Curve

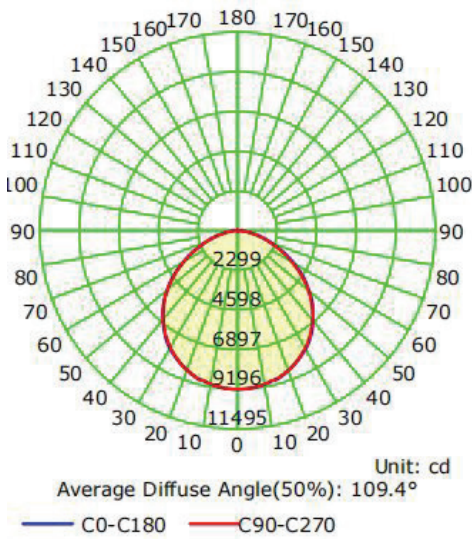

The Average Illuminance Effective Figure

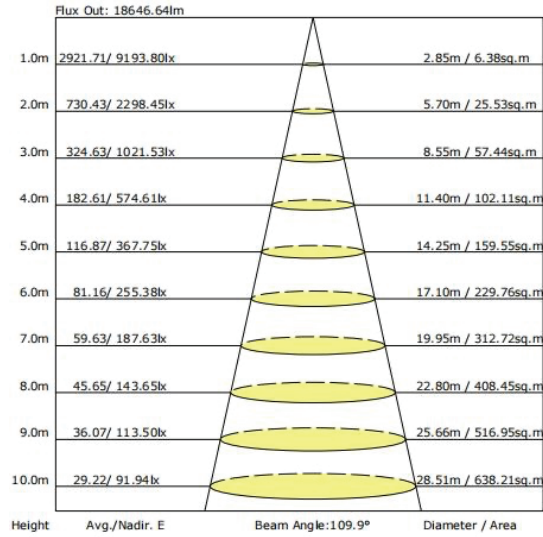

DIMENSIONS

