

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

## COMET 4" & 6" TRIMLESS SELECTABLE DOWNLIGHTS



The Comet 4" & 6" Trimless Selectable Downlights are highly versatile commercial-grade, indoor downlights. The 4" is 15W and 1,000 lumens, while the 6" is 24W and 1,600 lumens. Both sizes create a 38° beam angle. The downlights are 5-CCT selectable: 2700K, 3000K, 3500K, 4000K, and 5000K. Additional premium features include: 90+ CRI, ICAT, wet location listed, no housing needed, dimmable to 10%, ENERGY STAR certified, and JA8 listed CA Title 24.

### FEATURES

- Trimless mud-in ring for high-end appearance.
- ICAT and wet location listed.
- Fast installation, no housing required.
- Dimmable to 10%.
- ENERGY STAR, JA8 Title 24, and cETLus listed.
- Black or white trim finish options

### APPLICATIONS

- Offices
- Retail and Malls
- Schools
- Hospitality
- Healthcare
- Reception areas
- Conference rooms
- Hallways



# COMET 4" & 6" TRIMLESS SELECTABLE DOWNLIGHTS

## ORDERING INFORMATION

PART NUMBER	WATTAGE	LUMENS	VOLTAGE	APERATURE	CCT	MIN ORDER QTY	US STOCK
ECO-ADI-COMET-S15W-4-TDL	15W	1000	120 VAC	4.0"	2700/3000K/3500K/4000K/5000K	2	YES
ECO-ADI-COMET-S24W-6-TDL	24W	1600	120 VAC	6.0"	2700/3000K/3500K/4000K/5000K	2	YES

## TECHNICAL SPECIFICATIONS

Beam Angle	38°
CRI	90+
Efficacy	67 lpW
Environment	Wet location listed, ICAT
Input Voltage	120 VAC
Power Frequency	60 Hz
Certifications	ENERGY STAR, JA8 Title 24, cETLus, FCC
Power Factor	>0.9
Rated Life (L70)	50,000 hours
Warranty	10 Years or 50,000 Hours Non-Prorated
Operating Temperature	-4°F - 104°F
Luminaire Gross Weight	0.67kg for 4", 1.12kg for 6"
Dimmable	Down to 10%, forward-phase , reverse-phase, TRIAC, & ELV dimmers

\*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.


\*IES files provided on request.

## CONTROLS

Control Options: Dimmable down to 10%, forward-phase, reverse-phase, TRIAC, & ELV dimmers.  
5-CCT selectable: 2700K, 3000K, 3500K, 4000K, 5000K.




**Durable Slide Switch**  
**5CCT Selectable**

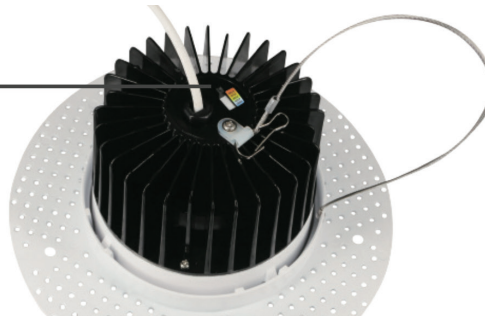



# COMET 4" & 6" TRIMLESS SELECTABLE DOWNLIGHTS

## DIMENSIONS

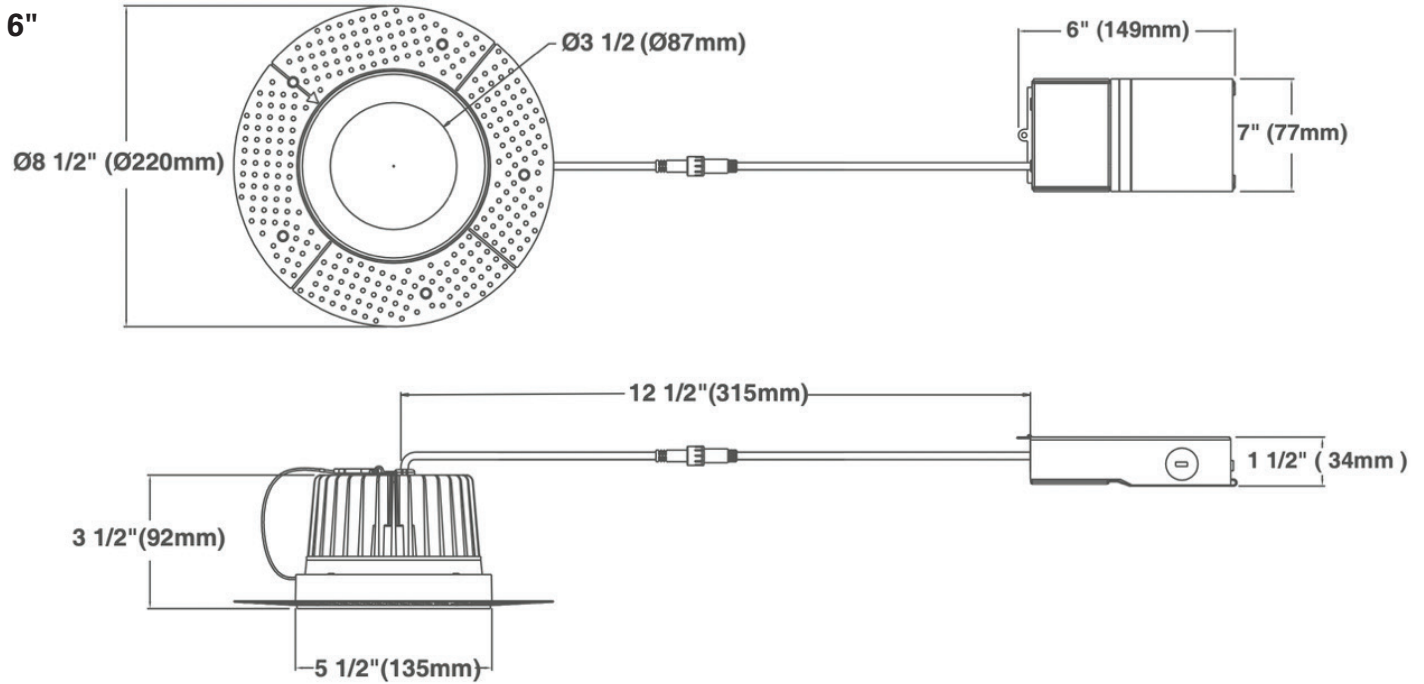

## ACCESSORIES


4"

### Mounting Plates



#### MP-95

The MP-95 is a 3-3/4" new construction pre-mounting plate opening Ø3-3/4" (95mm)



#### MP-UNV-23354

The MP-UNV-23354 is a 2-2/3"/3.5-1/4" new construction pre-mounting plate opening Ø2-1/8" (54mm), Ø2-7/8" (72mm), Ø3-3/4" (95mm), Ø5-1/4" (132mm)

### Flexible Connector



#### FLEX-4/ 6/ 10/ 20

4ft/ 6ft/ 10ft/ 20ft flexible connector

6"

### Flexible Connector



#### FLEX-4/ 6/ 10/ 20

4ft/ 6ft/ 10ft/ 20ft flexible connector