

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

ULTRA-THIN SERIES CANOPY FIXTURE




The **Ultra-Thin Series Canopy Fixture** has a contemporary, low-profile design that works in applications where other canopy fixtures will not. Although this fixture has a modest size, it is a very high performing fixture. With high lumen output and uniquely designed lens, this fixture provides exceptional performance and is a very cost effective solution for any garage or canopy application. Fixture has multiple wiring ports for direct wiring or when using surface mounted conduit.

FEATURES

- System Efficiency - up to 141 lm/W
- Luminous Flux - up to 8000 lumens
- Replaces 100-175W metal halide
- Input Voltage - 120-277 MV
- Rebate Eligible - Yes, DLC Listed / Contact for details
- Warranty - 10 Years or 50,000 Hours Non-Prorated
- PIR sensor and emergency battery options
- Sealed, die-cast housing, wet location listed

APPLICATIONS

- Gas stations
- Canopy
- Parking garages
- Storage areas
- Shopping area walkways
- Entryways



ULTRA-THIN SERIES CANOPY FIXTURE

ORDERING INFORMATION

PART NUMBER	WATTS	VOLTAGE	LUMENS	CCT	DIMMABLE	MIN ORDER QTY	US STOCK
ECO-SEM-MCP05-20W	20W	120-277 VAC	2,600	4000K, 5000K	NO	2	Yes
ECO-SEM-MCP05-27W	27W	120-277 VAC	3,800	4000K, 5000K	0-10V	2	Yes
ECO-SEM-MCP05-40W	40W	120-277 VAC	5,450	4000K, 5000K	0-10V	2	Yes
ECO-SEM-MCP05-60W	60W	120-277 VAC	8,000	4000K, 5000K	0-10V	2	Yes

TECHNICAL SPECIFICATIONS

System Efficacy	up to 141 lm/W
Luminous Flux	up to 8,000 lumens
CCTs	4000K, 5000K
CRI	70+
Input Voltage	120-277 VAC
Power Frequency	50-60 Hz
Certifications	UL, DLC , FCC
Environment	Wet listed
Lifetime (L70)	>50,000 hours
Warranty	10 years or 50,000 hours non-prorated
Operating Temperature	-40°F - +104°F
Housing Color	Dark Bronze, Black, White, Silver Gray
Dimmable	0-10V (except 20W)

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.

MOUNTING ACCESSORIES

Housing

One piece die cast housing better waterproofing ,suitable for both indoor and outdoor application.

Mounting Bracket

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting,wires coming out from the back for easier wire connections.

PHOTOMETRY

Parking Garage Photometry and polycarbonate optical lens with heat resisting.

1/2inch knock hole


Support wires coming from the hole for easier wire connections. Optional PIRsensor and Emergency Battery.



CONTROLS

Control Options: 0-10V (except 20W) / PIR sensor option / emergency battery option (except 20W).


PHOTOMETRICS

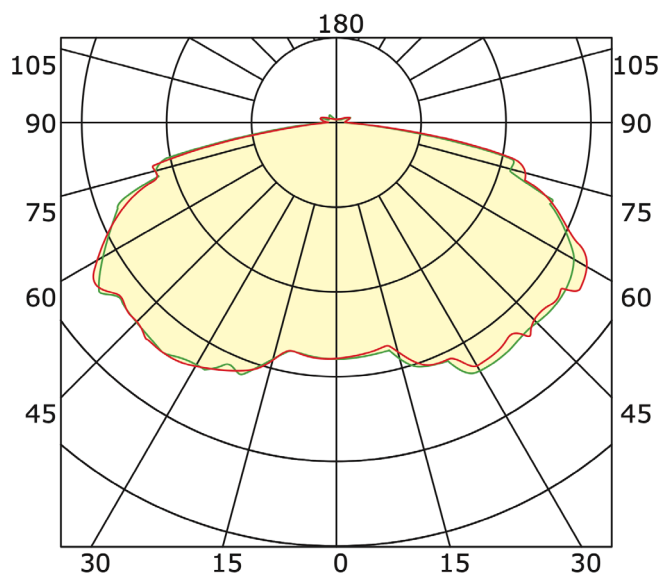

ULTRA-THIN SERIES CANOPY FIXTURE

DIMENSIONS

Net Weight:
20W: 3.536lbs
27W: 3.615lbs
40W: 4.166lbs

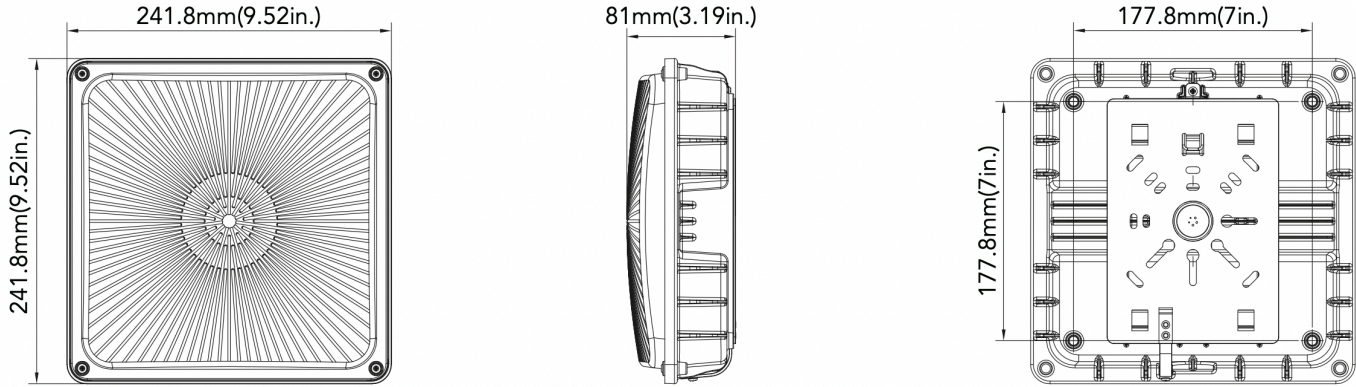

Net Weight:
60W: 5.070lbs

