

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

NIGHT HAWK MINI WALL PACK




The **Night Hawk Mini Wall Pack** delivers great wall pack performance in a small form factor. The durable die-cast aluminum housing has a powder-coat finish, and a high transmittance polycarbonate lens. These Mini Wall Packs have a built-in photocell and 0-10V dimming. They are ideal for warehouses, stadiums, industrial facilities, parking lots, and many other commercial buildings. cULus and DLC Premium listed for maximum utility rebates.

FEATURES

- Smaller form factor is less obtrusive during the day
- Built in universal photocell
- Die-cast aluminum housing with powder-coat finish
- High transmittance polycarbonate lens
- 0-10V dimming
- 120-277VAC
- cULus and DLC Premium listed for maximum rebates
- Wall mounting with backside plate for easy install

APPLICATIONS

- Warehouse
- Stadiums
- Industrial facilities
- Parking lots
- Shopping malls
- Supermarkets
- Car dealerships



ORDERING INFORMATION

MODEL #	WATTAGE	LUMENS	INPUT VOLTAGE	CCT	MINIMUM ORDER QTY	US STOCK
ECO-ML-WPA-26W-50K-P	26W	3,588	120-277VAC	5000K	2	Yes

TECHNICAL SPECIFICATIONS

Wattage	26W
CCT	5000K
Optical Distributions	120 degree beam angle
Efficacy	138 lm/W
Input Voltage	120-277 VAC
Power Frequency	50/60 Hz
Power Factor	>0.9
CRI	80+
Housing Material	Die-cast aluminum with powder-coat finish
Lens Material	High transmittance polycarbonate
Lumens	3,588
Warranty	10 Years or 50,000 hrs non-prorated
Operating Temperature	-4° to 113° F
Controls	Built-in universal photocell, 0-10V dimming
Mounting Options	Wall mounting with backside plate for easy install
Certifications	cULus, DLC Premium

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.


*IES files provided on request.

CONTROLS

Control Options: Built-in universal photocell, 0-10V dimming

PHOTOMETRICS

ECO-WPA-26W-50K-P

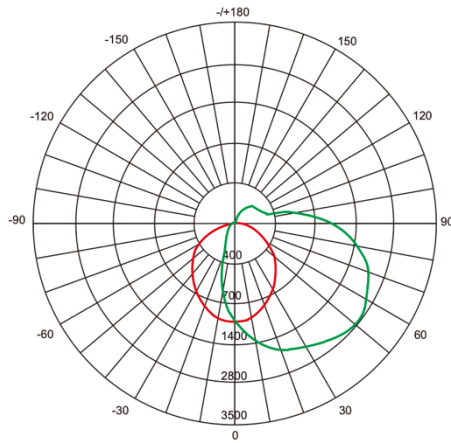

AVERAGE BEAM ANGLE(50%): 118.3°

UNIT:CD

Lumens:2860LM
Test Number:26W
Test Number:5000K

— C0/180,113.7
— C30/210,100.1
— C60/240,108.6
— C90/270,130.9

DIMENSIONS unit: mm/inch

