

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

NEBULA 2" ROUND TRIMLESS GIMBAL DOWNLIGHT



The **Nebula 2" Round Trimless Gimbal Downlight** is a feature-packed, spec-grade downlight that delivers a high-end, new construction aesthetic. The Nebula is 5-CCT selectable (2700K, 3000K, 3500K, 4000K, & 5000K), with 30° tilting gimbal, and a mud-in trimless installation. Additional premium features include: 90+ CRI, ICAT rated, wet location listed, no junction box needed, dimmable to 10%, ENERGY STAR certified, and JA8-listed CA Title 24.

FEATURES

- 5-CCT selectable
- 30 degree gimbal tilt
- No housing required
- ICAT rated and wet location listed
- Dimmable to 10% with TRIAC, ELV, & phase-cut
- ENERGY STAR and JA8 CA T24 certified
- Black or white trim finish options

APPLICATIONS

- Offices
- Retail and Malls
- Schools
- Hospitality
- Healthcare
- Reception areas
- Conference rooms
- Hallways



NEBULA 2" ROUND TRIMLESS GIMBAL DOWNLIGHT

ORDERING INFORMATION

PART NUMBER	WATTAGE	LUMENS	VOLTAGE	APERATURE	CCT	MIN ORDER QTY	US STOCK
ECO-ADI-NEBU-S8W-3-TGDL	8W	600	120 VAC	2.0"	2700/3000K/3500K/4000K/5000K	2	YES

TECHNICAL SPECIFICATIONS

Beam Angle	38°
CRI	90+
Efficacy	75 lpW
Environment	Wet location listed, ICAT rated
Input Voltage	120 VAC
Power Frequency	60 Hz
Certifications	ENERGY STAR, JA8 Title 24, cETLus, FCC
Power Factor	>0.9
Rated Life (L70)	50,000 hours
Warranty	10 Years or 50,000 Hours Non-Prorated
Operating Temperature	-4°F - 104°F
Luminaire Gross Weight	0.37 kg
Dimmable	Down to 10%, forward-phase , reverse-phase, TRIAC, & ELV dimmers

*Data is based upon tests performed in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

*IES files provided on request.

CONTROLS


Control Options: Dimmable down to 10%, forward-phase, reverse-phase, TRIAC, & ELV dimmers. 5-CCT selectable: 2700K, 3000K, 3500K, 4000K, 5000K.

NEBULA 2" ROUND TRIMLESS GIMBAL DOWNLIGHT


FEATURES



**Durable Slide Switch
5CCT Selectable**



38° beam angle





30° Tilt





360° Rotation

INSTALLATION

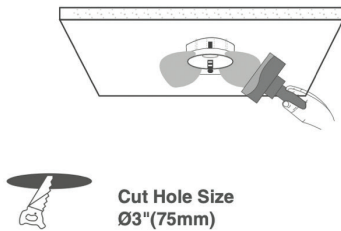


Cut Hole Size
Ø3" (75mm)

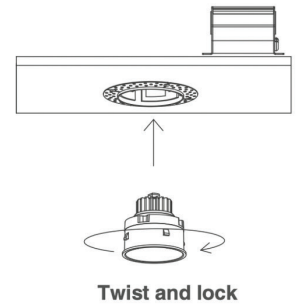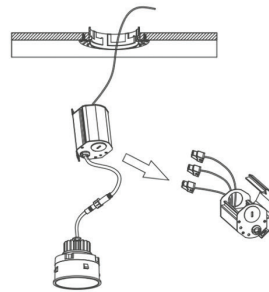

Twist and lock

NEBULA 2" ROUND TRIMLESS GIMBAL DOWNLIGHT

DIMENSIONS

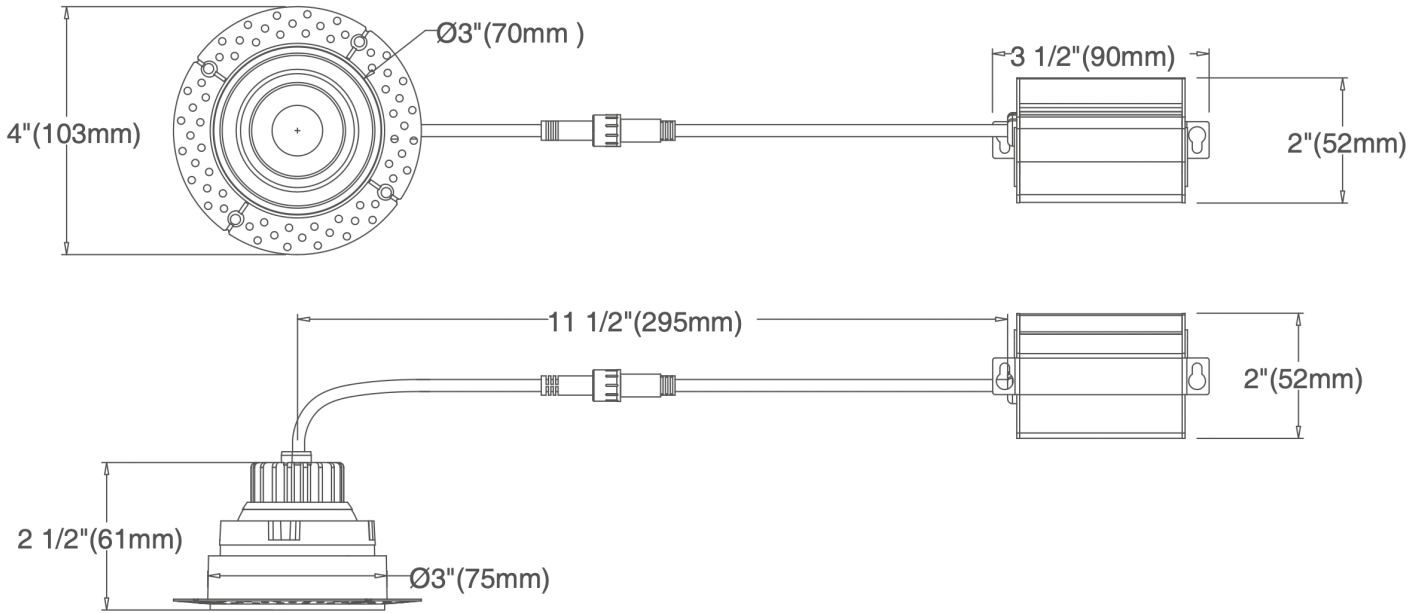


ACCESSORIES

Mounting Plates



MP2-78

The MP2-78 is a 3" new construction pre-mounting plate opening Ø3" (78mm)



MP-UNV-346

The MP-UNV-346 is a 3 1/4" x 6" new construction pre-mounting plate opening Ø3" (75mm), Ø4-3/8" (110mm), Ø6-1/4" (160mm)

Flexible Connector



FLEX-4/ 6/ 10/ 20

4ft/ 6ft/ 10ft/ 20ft flexible connector